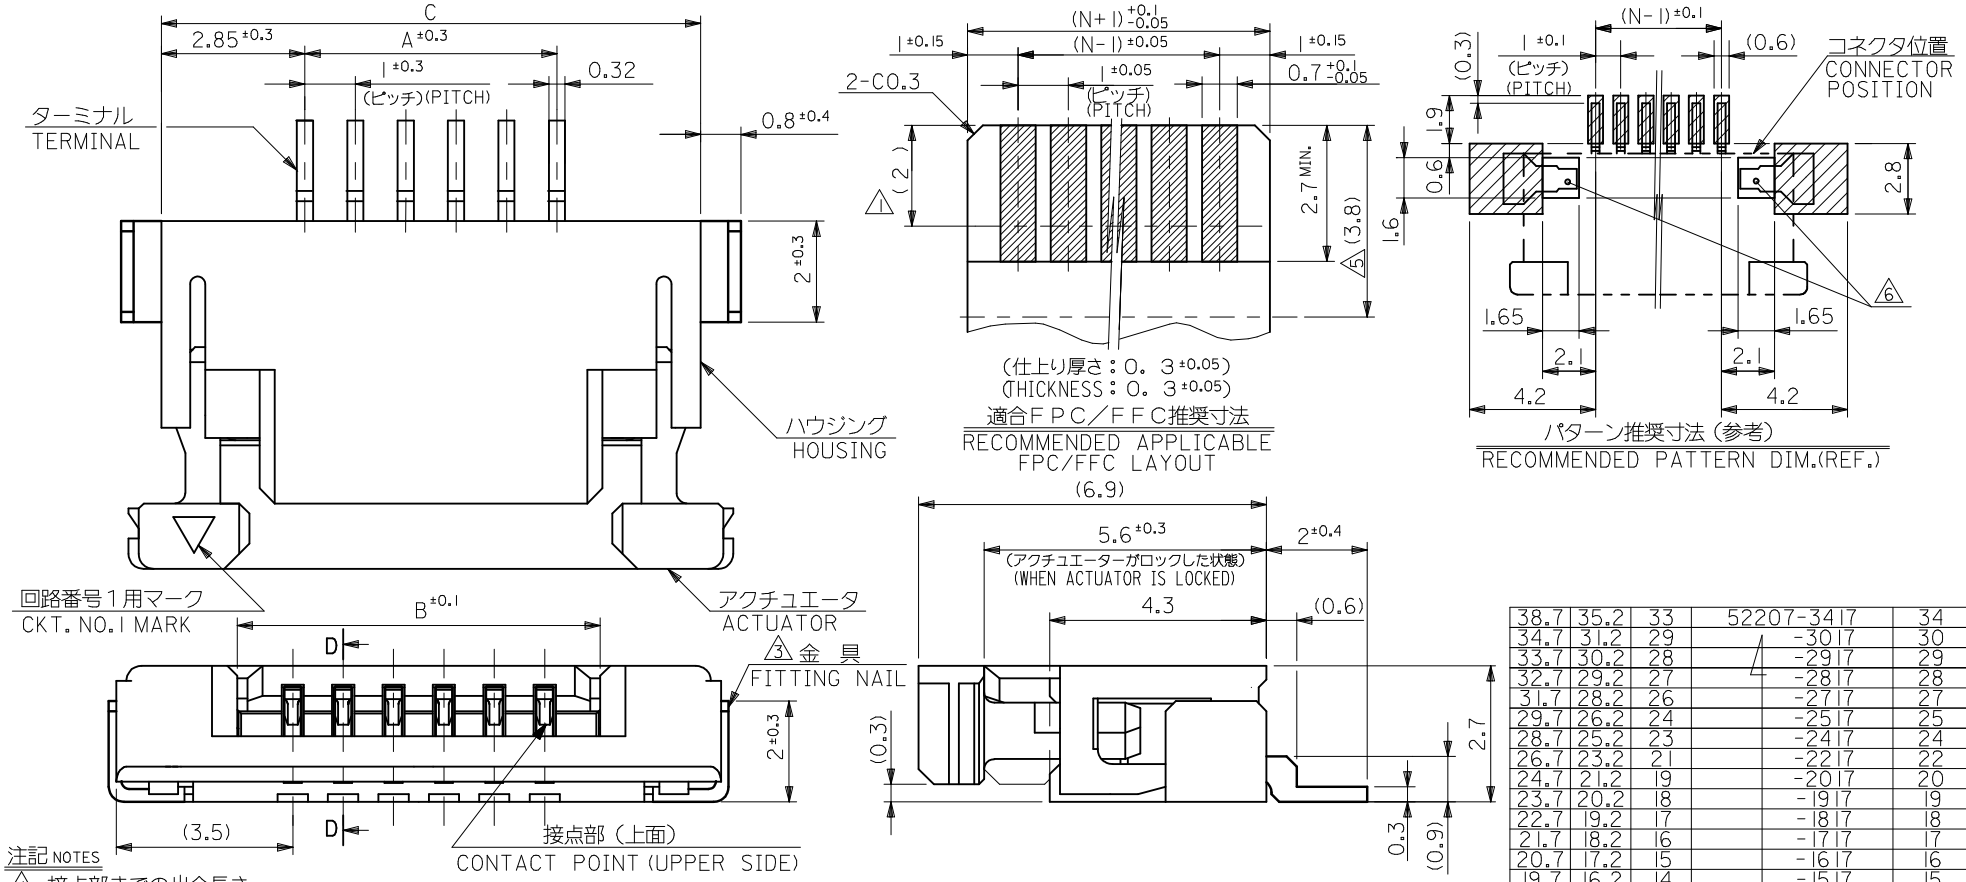


注記 NOTES

1. 接点部までの嵌合長さ。
   LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
   ハウジング　：46ナイロン（耐熱性），UL94V−0
   HOUSING : 46NYLON, UL94V-0
   アクチュエータ：PPS，UL94V−0
   ACTUATOR : PPS, UL94V-0
   ターミナル　：リン青銅、半田メッキ（t＝0．32）
   TERMINAL : PHOS-BRO., TIN-LEAD PLATED (t=0.32)
   金具　：銅合金、半田メッキ（t＝0．25）
   FITTING NAIL : COPPER ALLOY, TIN-LEAD PLATED (t=0.25)
3. パターンはくり止め用金具
   FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
4. エンボステープ梱包時は，アクチュエータがロックした状態とする。
   IN THE PACKAGE, ACTUATOR OF PART NO. 52207-**17 SHOULD BE LOCKED.
5. ケーブル挿入深さ
   INSERTION DEPTH OF CABLE.
6. パターン書き込み禁止エリア。
   NO FOOT PRINT AREA.

C	B	A	MATERIAL NO.	極数 CKT.
38.7	35.2	33	52207-3417	34
34.7	31.2	29	-3017	30
33.7	30.2	28	-2917	29
32.7	29.2	27	-2817	28
31.7	28.2	26	-2717	27
29.7	26.2	24	-2517	25
28.7	25.2	23	-2417	24
26.7	23.2	21	-2217	22
24.7	21.2	19	-2017	20
23.7	20.2	18	-1917	19
22.7	19.2	17	-1817	18
21.7	18.2	16	-1717	17
20.7	17.2	15	-1617	16
19.7	16.2	14	-1517	15
18.7	15.2	13	-1417	14
16.7	13.2	11	-1217	12
15.7	12.2	10	-1117	11
14.7	11.2	9	-1017	10
13.7	10.2	8	-0917	9
12.7	9.2	7	-0817	8
11.7	8.2	6	-0717	7
10.7	7.2	5	-0617	6
7.7	4.2	2	52207-0317	3

REVISED
EC NO: J2014-1471 2014/04/16
DRWN:AYOSHI101 2014/04/16
CH'KD:YKOBAYASHI02 2014/04/16
APPR:YNOGAWA 2014/04/17
DESCRIPTION
REV B

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY: MTAKAHASHI04 DATE: 2013/07/24
CHECKED BY: KTAKAHASHI DATE: 2013/07/24
APPROVED BY: YNOGAWA DATE: 2013/10/07
MATERIAL NO.: SEE CHART

TITLE: 1.0 FPC CONN. ZIF SMT (SHEET 1 OF 2)


molex

DOCUMENT NO.: SD-52207-071
SHEET NO.: 1 OF 2
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

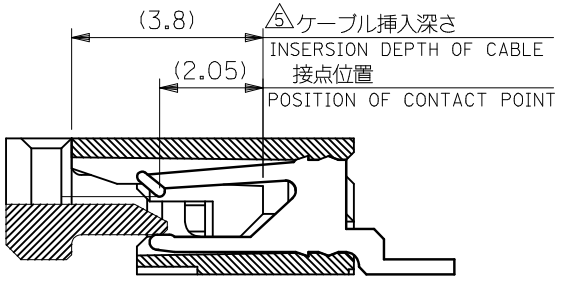

断面D－D
SECT.D-D

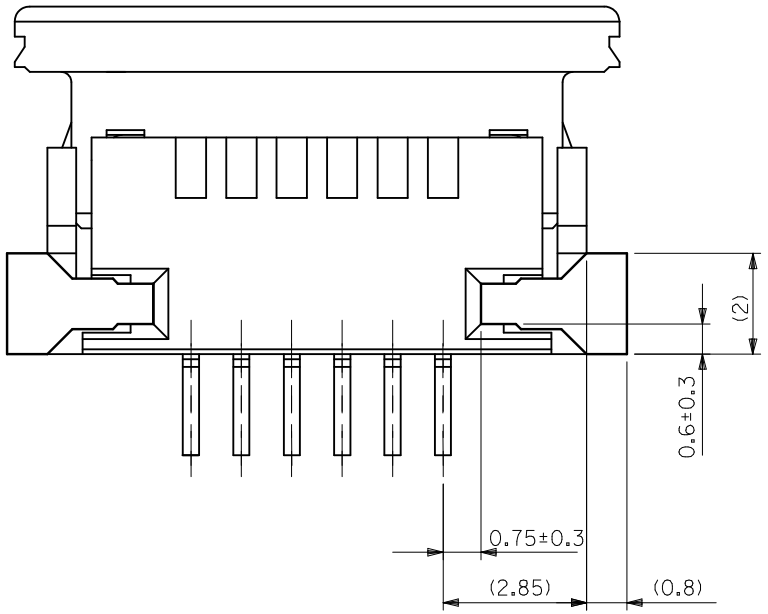

下面図
BOTTOM VIEW

REVISED EC NO: J2014-1471 2014/04/09 DRWN:AYOSHI101 2014/04/09 CH'KD:YKOBAYASHI02 2014/04/09 APPR:YNOGAWA 2014/04/17	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE: MM ONLY
	10 UNDER ±0.2	SCALE: ---
	10 OVER 30 UNDER ±0.25	DESIGN UNITS: METRIC
	30 OVER ±0.3	THIRD ANGLE PROJECTION
	ANGULAR ±3 °	DRAWN BY: MTAKAHASHI04 DATE: 2013/07/24
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHECKED BY: KTAKAHASHI DATE: 2013/07/24
		APPROVED BY: YNOGAWA DATE: 2013/10/07
B	REV DESCRIPTION	MATERIAL NO.: SEE SHEET 1 OF 2

TITLE: 1.0 FPC CONN ZIF SMT SHEET 2 OF 2


molex


DOCUMENT NO.: SD-52207-071


SHEET NO.: 2 OF 2

SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

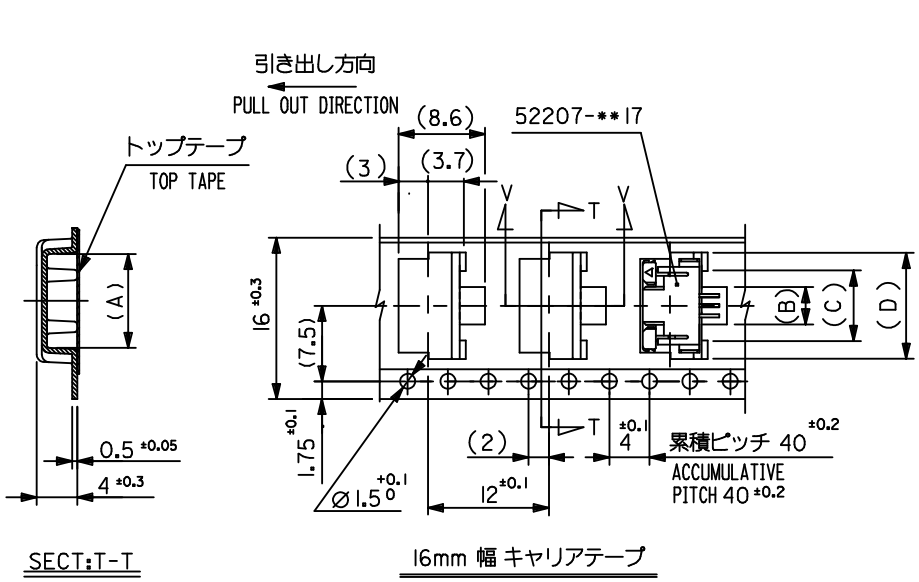

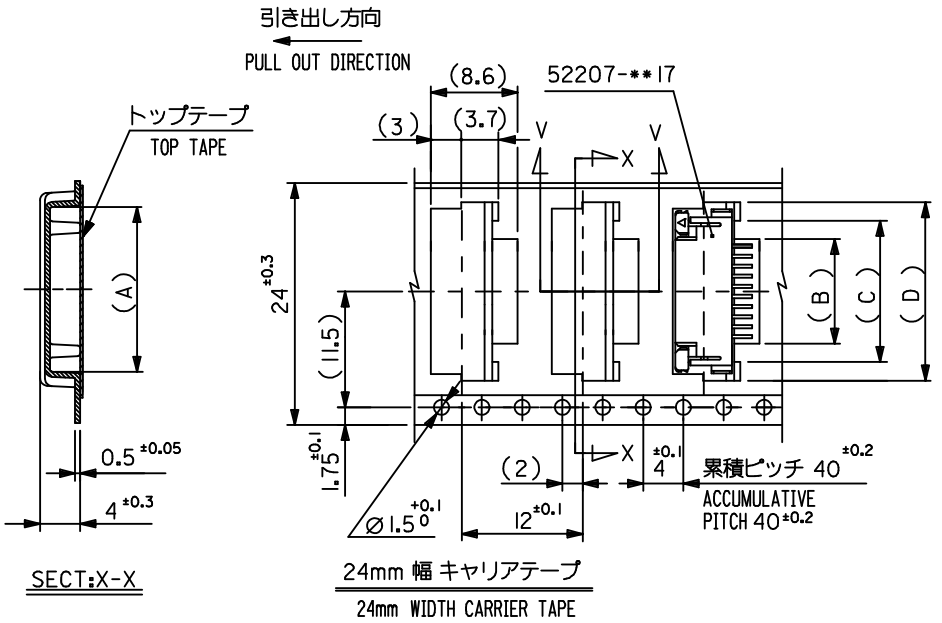

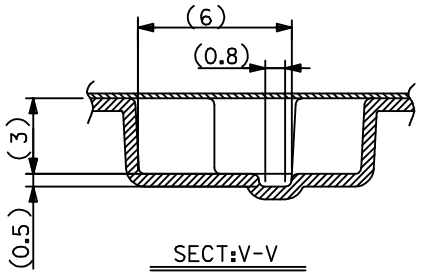

キャリアテープ幅 CARRIER TAPE WIDTH	E	(D)	(C)	(B)	(A)	ENG. NO.	極数 CKT.
24	25.5	18.5	15	11.7	17.3	52207-1190	11
		17.5	14	10.7	16.3	4 -1090	10
		16.5	13	9.7	15.3	-0990	9
		15.5	12	8.7	14.3	-0890	8
		14.5	11	7.7	13.3	-0790	7
		13.5	10	6.7	12.3	-0690	6
16	17.5	10.5	7	3.7	9.3	52207-0390	3

REVISED
EC NO: J2014-1471 2014/04/16
DRWN:AYOSHI101 2014/04/16
CH'KD:YKOBAYASHI02 2014/04/16
APPR:YNOGAWA 2014/04/17
DESCRIPTION
REV
B


GENERAL TOLERANCES (UNLESS SPECIFIED)
10 UNDER ±---
10 OVER 30 UNDER ±---
30 OVER ±---
ANGULAR ±--- °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS


DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: MTAKAHASHI04 DATE: 2013/07/24
CHECKED BY: KTAKAHASHI DATE: 2013/07/24
APPROVED BY: YNOGAWA DATE: 2013/10/07
MATERIAL NO.: SEE CHART


TITLE: EMBOSSED TAPE PACKAGE FOR 52207-**17 SHEET 1 OF 3
molex
DOCUMENT NO.: SD-52207-072
SHEET NO.: 1 OF 3
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

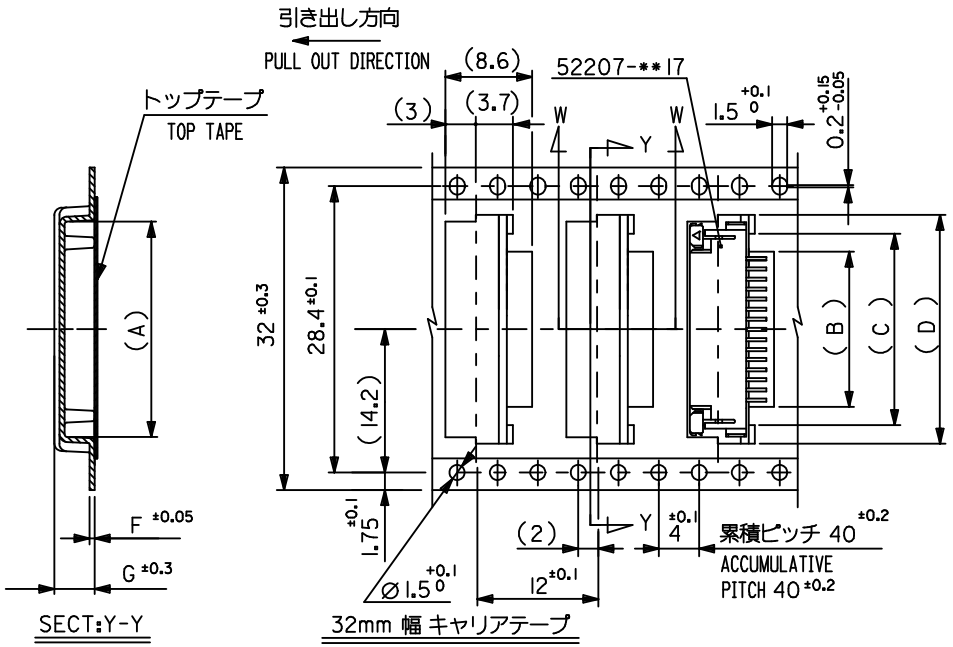

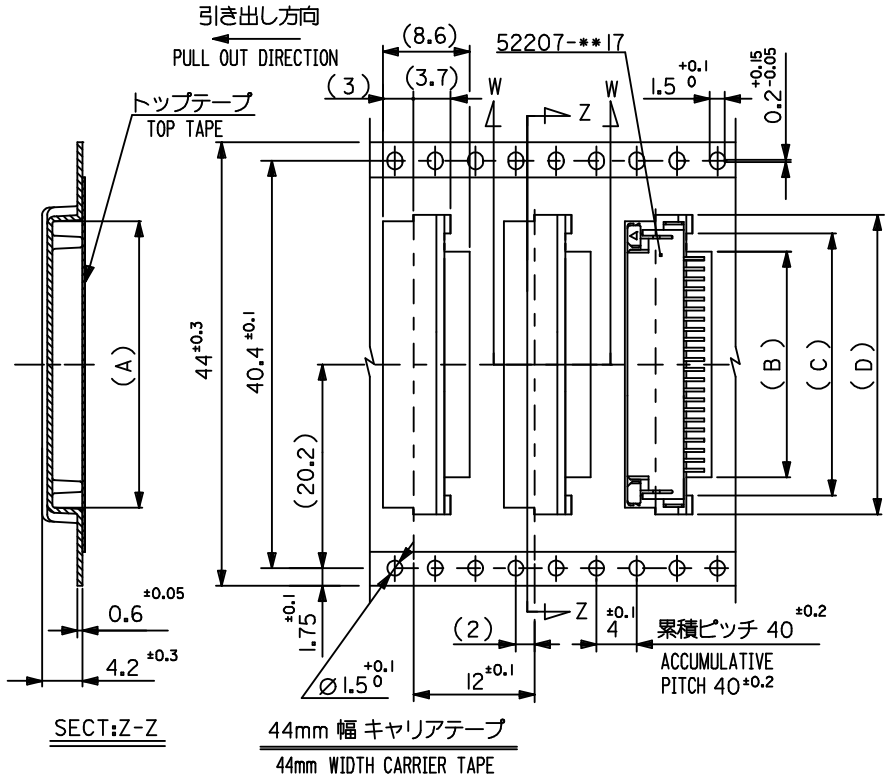

32	33.5	4.0	0.5	23.5	20	16.7	22.35	52207-1690	16
		4.2	0.6	22.5	19	15.7	21.35	52207-1590	15
		4.2	0.6	21.5	18	14.7	20.35	52207-1490	14
		4.2	0.6	19.5	16	12.7	18.35	52207-1290	12
キャリアテープ幅 CARRIER TAPE WIDTH	E	(G)	(F)	(D)	(C)	(B)	(A)	ENG. NO.	極数 CKT.

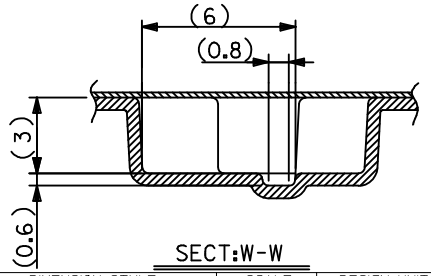

44	45.5	34.5	31	27.7	33.35	52207-2790	27
		32.5	29	25.7	31.35	52207-2590	25
		31.5	28	24.7	30.35	52207-2490	24
		29.5	26	22.7	28.35	52207-2290	22
		27.5	24	20.7	26.35	52207-2090	20
		26.5	23	19.7	25.35	52207-1990	19
		25.5	22	18.7	24.35	52207-1890	18
		24.5	21	17.7	23.35	52207-1790	17
キャリアテープ幅 CARRIER TAPE WIDTH	E	(D)	(C)	(B)	(A)	ENG. NO.	極数 CKT.

REVISED
EC NO: J2014-1471 2014/04/16
DRWN:AYOSHI101 2014/04/16
CH'KD:YKOBAYASHI02 2014/04/17
APPR:YNOGAWA 2014/04/17
DESCRIPTION
REV
B

GENERAL TOLERANCES (UNLESS SPECIFIED)


10 UNDER	± ---
10 OVER 30 UNDER	± ---
30 OVER	± ---
ANGULAR ± --- °	


DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: MTAKAHASHI04 DATE: 2013/07/24	TITLE: EMBOSSED TAPE PACKAGE FOR 52207-**17 SHEET 2 OF 3		
CHECKED BY: KTAKAHASHI DATE: 2013/07/24			
APPROVED BY: YNOGAWA DATE: 2013/10/07	molex		
MATERIAL NO.: SEE CHART	DOCUMENT NO.: SD-52207-072	SHEET NO.: 2 OF 3	


SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

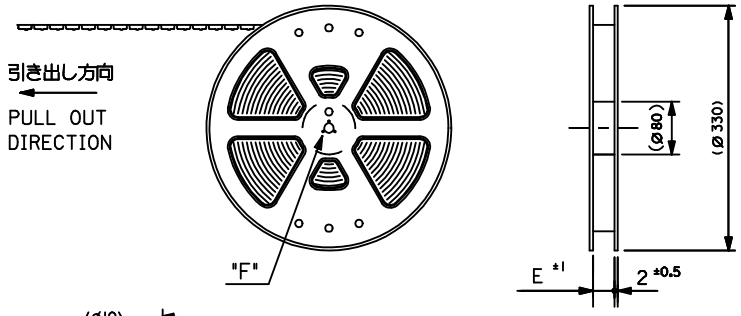



DETAIL "F"

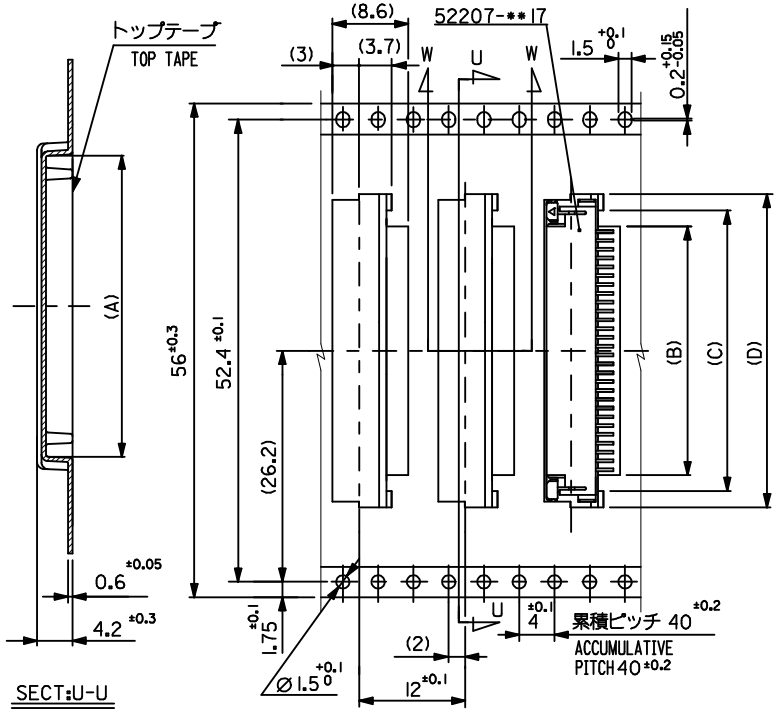


SECT:U-U


56mm 幅 キャリアテープ
56mm WIDTH CARRIER TAPE

注記

1. 製品番号 52207-**17 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52207-071 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO. 52207-**17 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52207-071
2. 梱包数量：１０００個／リール
NUMBER OF CONNECTORS : 1000PCS/REEL
3. リードテープ長さ(LEAD TAPE LENGTH)

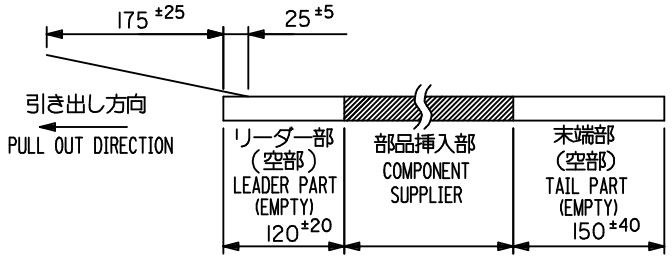

4. トップテープの剥離強度：（剥離方向は下図参照）
60gfMAX. 尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)
PEELING OFF FORCE OF TOP TAPE : 60gf MAX. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT. (PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.)



5. 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET, PE, PEF
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYREN (PS) <RECYCLE MATERIAL CONTAINED>

キャリアテープ幅 CARRIER TAPE WIDTH	E	(D)	(C)	(B)	(A)	ENG. NO.	極数 CKT.
56	57.5	41.5	38	34.7	40.35	52207-3490	34
		37.5	34	30.7	36.35	52207-3090	30
		36.5	33	29.7	35.35	52207-2990	29
		35.5	32	28.7	34.35	52207-2890	28

REVISED
EC NO: J2014-1471 2014/04/16
DRWN: AYOSHI101 2014/04/16
CHKD: YKOBAYASHI02 2014/04/17
APPR: YNOGAWA 2014/04/17
DESCRIPTION
REV B

GENERAL TOLERANCES (UNLESS SPECIFIED)
10 UNDER ±---
10 OVER 30 UNDER ±---
30 OVER ±---
ANGULAR ±--- °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION
DRAWN BY: MTAKAHASHI04 DATE: 2013/07/24
CHECKED BY: KTAKAHASHI DATE: 2013/07/24
APPROVED BY: YNOGAWA DATE: 2013/10/07
MATERIAL NO.: SEE CHART
TITLE: EMBOSSED TAPE PACKAGE FOR 52207-**17 SHEET 3 OF 3
molex
DOCUMENT NO.: SD-52207-072
SHEET NO.: 3 OF 3
SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Find price and stock options from leading distributors for 52207-0890 on Findchips.com:

https://findchips.com/search/52207-0890

Find CAD models and details for this part:

https://findchips.com/detail/52207-0890/Molex