




UXP-DM-114

7-16 DIN Male Connector for 1 1/4" Cable

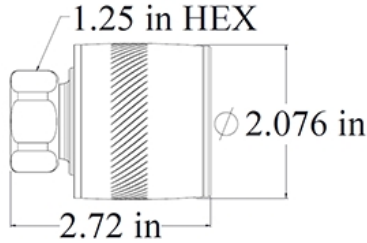

[Installation video](#)



[Installation instructions](#)



Contact technical support:

1-888-201-6073

techsupport@jmawireless.com

General	Specification			
Interface/gender	7-16 DIN male			
Cables supported ¹	Manufacturer	P/N	Manufacturer	P/N
	RFS	UCF114	CommScope	AVA6
	NK Draka	RFA114		AL6
	Eupen Flexline	1-1/4"R	Rosenberger	SL 1-1/4" R
	LS/Superior Essex	LHF 33D		
Weight	0.975 lb 442.3 g			
JMA Weather Protection System	Boot: WPS-6 Port seal: WPS-DF			

Tools required	JMA part number	Comment
Cable preparation	SP-114	No coring required
Torque wrench	TQ-114-F18	18 lbf-ft 24.4 N·m

	Compression tool	Frameset	Comment
Connector compression options	HCG-CC (RP 240 / RP 210-B / RP 100-B)	HCG-FS-114-01	
	HCG-CC (RP 240 / RP 210-B / RP 100-B)	HCG-FRAMESET-114	

Frequency band	VSWR	Return loss (dB)
DC-1000 MHz	1.02	40
1000-2000 MHz	1.03	36
2000-4000 MHz	1.05	32
4000-6000 MHz	1.08	28

Electrical	Specification	Comment
Connector impedance	50 ohm	
Operating frequency band	DC-6 GHz	
3rd order IMD dynamic, (PIM)	-161 dBc, typical	IEC 62037-2
DC test voltage	4000 V	
Center contact resistance	≤ 0.4 milliohm	
Outer contact continuity	1.5 milliohm max.	
Average power	3000 W @ 900 MHz	
Peak power, max.	40 kW	
Insertion loss, typical	0.05 dB	Per connector
Shielding effectiveness	< -130 dB	@ 0-1 GHz

Mechanical	Specification	Comment
Pull force combined	1.89 kN >425 lb	Cable limited
Cable retention torque	54.2 N·m 40 lbf·ft	Cable limited
Interface durability	500 cycles	IEC 61169-4:9.5

¹For cable types not listed, please contact JMA Technical Support.



UXP-DM-114

7-16 DIN Male Connector for 1 1/4" Cable

Environmental	Specification	Test
Operating temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Accelerated UV	1000 hr	ASTM G154
Immersion test method	Mated & unmated, IP68	IEC 60529:2001 & ANSI/SCTE 60
Water jetting test method	Mated & unmated, IP66	IEC 60529:2001
Mechanical shock test method	Pass	IEC 60068-2-27
Thermal shock test method	Pass	IEC 60068-2-14
Vibration test method	100 m/s ² , 2 Hz to 200 Hz	IEC 61169-1:2003
Corrosion test method	1000 hr	IEC 60068-2-11

05/05/26