

FDC® Unit Capacity for (24) 6 inch FDC® Connector Panels or Modules and (22) 0.2 inch (Type 2R, 2S, 2M) splice trays

CORNING

Part Number: FDC-001

Corning FDC® unit product line is a family of housings combined for the splicing and termination of fiber optic cable. Designed to support both cross-connect and interconnect architectures, FDC units can be used in a wiring center as an interface to transmission equipment or in dedicated fiber frames where test access and reconfiguration are key requirements.

FDC units combine the benefits of connector housings and splice housings into single units. These units use standard FDC unit panels and modules and are available in 24-, 72- and 144-fiber capacities. FDC units are compact and modular, providing ample termination and splice storage capabilities.

To improve quality and reduce installation time of these FDC units, Corning recommends factory-pigtailed connector panels or modules. Both are available with a variety of connector types and come complete with factory-installed and tested connectorized pigtails. These pigtailed units are ideal for use in FDC units to speed the termination of fiber cable and provide the consistent quality performance of factory-installed and polished connectors.


Features and Benefits

Available with all common industry connectors

Accepts multiple connector types in a single unit

Open design

Easier connector access

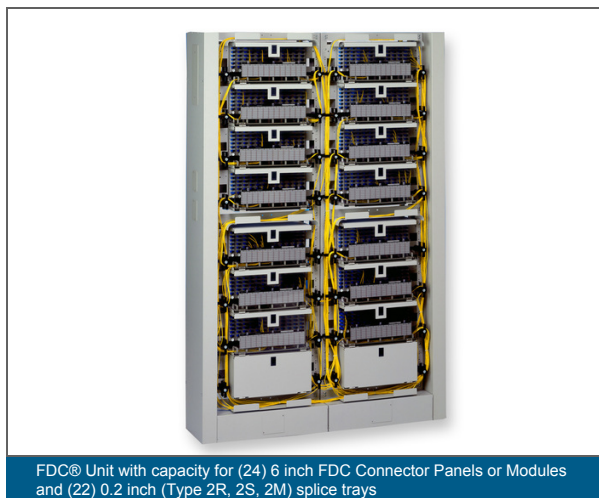

FDC® Unit Capacity for (24) 6 inch FDC® Connector Panels or Modules and (22) 0.2 inch (Type 2R, 2S, 2M) splice trays

CORNING

Specifications

General Specifications

Product Type	Rack-Mountable Hardware
Accessory Type	FDC
Mounting Type	Rack 23-in, Rack 19-in, Wall-Mountable

Design

Housing Type	FDC
Panel or Module Type	FDC

Design - Adapter

Housing Color	Beige
---------------	-------

Ordering Information

Product Number	FDC-001
EAN Code	4056418193670
Width	432 cm
Depth	279 cm
Height	673 cm
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved.