

Installation Instructions

Bulletin 7501418 (Page 1 of 2)

WeatherShield™

Main Feeder to Jumper Assembly



AWE-7812
AWE-11412
AWE-15812

Kits Include:
1 Enclosure
1 or 2 Grease packets

Kits work with the following cable diameters



Part Number: Cable Diameter:

AWE-7812 1.09" (28 mm) to 0.63" (16 mm)

AWE-11412 1.55" (39.4 mm) to 0.63" (16 mm)


AWE-15812 1.98" (50 mm) to 0.63" (16 mm)

Patent #695558

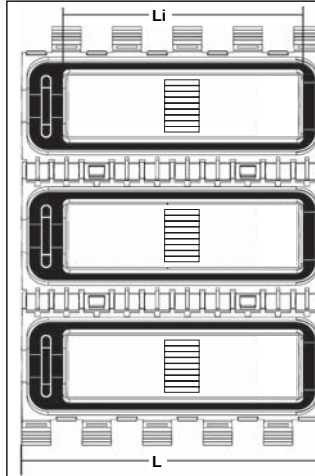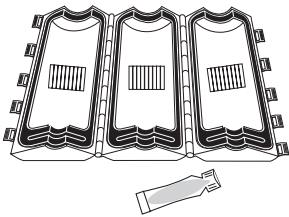


Dimensions: mm

Product size	Length L (+/-1)	Height H (+/-1)	Diameter D (+/-1)	Internal diameter Di (+/-1)	Internal length Li (+/-1)
AWE-7812	199.3	27.0	95.1	21.9	158.4
AWE-11412	250.0	39.7	120.5	69.3	209.1
AWE-15812	250.0	39.7	120.5	69.3	209.1

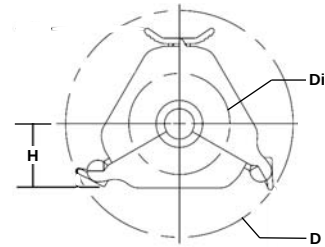

1 The Andrew Weatherproofing Enclosure is a hermetically sealed device.


Any moisture sealed into the kit will stay inside the enclosure. Wipe the inside of enclosure and all connections with a clean dry cloth before applying the unit to ensure the enclosure stays moisture free.

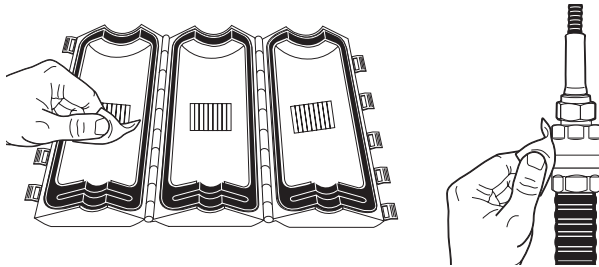


2

Seals must be completely lubricated.


Note: Use whole package

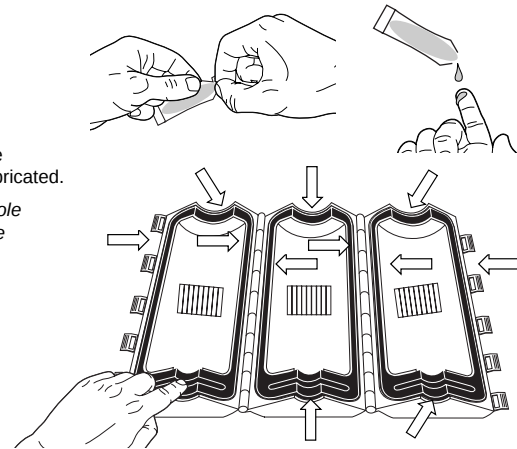

3

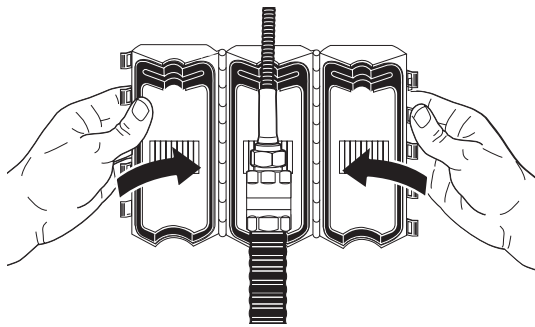


4


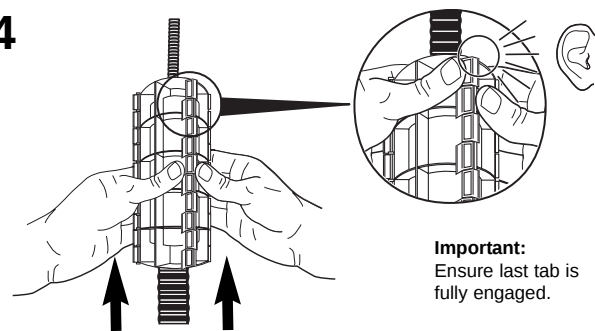


Important:
Ensure last tab is fully engaged.

5

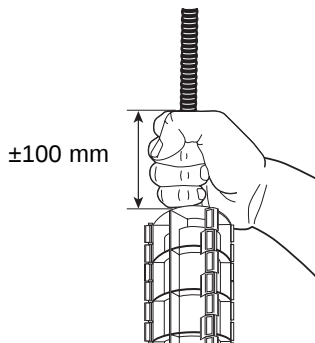

±100 mm

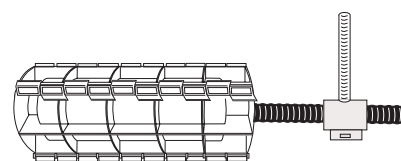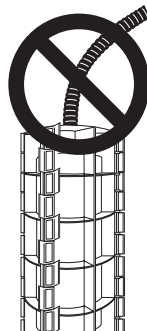

Horizontal Installation

Note: Support jumper before routing.

Minimum Bending Radius:

1/2" Superflex 1.25" (32 mm)


1/2" LDF 5" (125 mm)

Installation Training Available at Andrew Institute


4
3
2
1
Inches
100
90
80
70
60
50
40
30
20
Millimeters

Installation Instructions


- 1** To open WeatherShield release 4 tabs simultaneously by using both hands

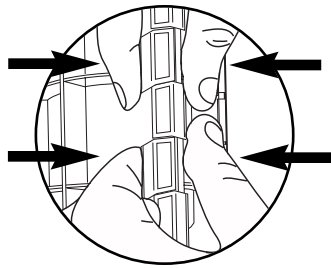


Removing and Replacing

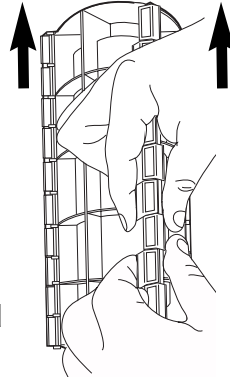

2

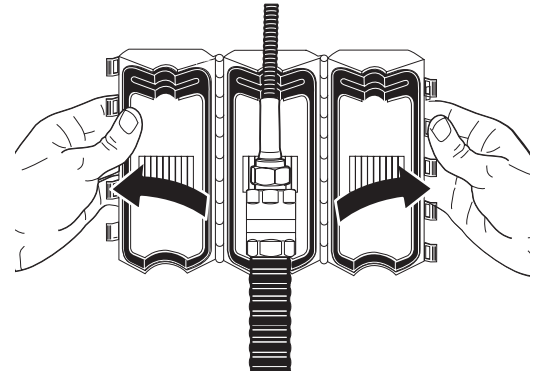


- 3** The Andrew Weatherproofing Enclosure is a hermetically sealed device. Any moisture sealed into the kit will stay inside the enclosure. Wipe the inside of enclosure and all connections with a clean dry cloth before applying the unit to ensure the enclosure stays moisture free.

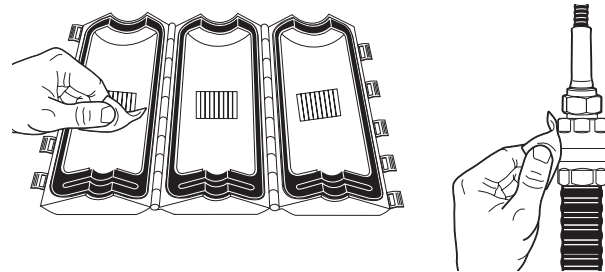


4

Seals must be completely lubricated.

Note: Use whole package

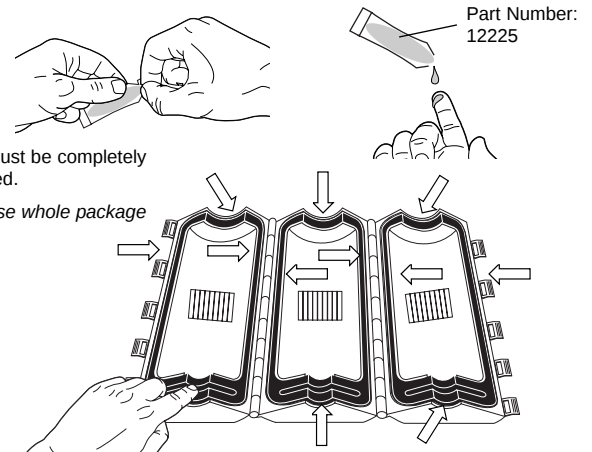

5

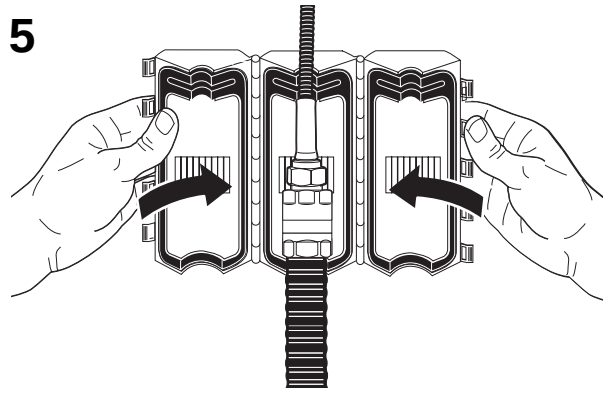

Notice: Andrew disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.

Aviso: Andrews no acepta ninguna obligación ni responsabilidad como resultado de prácticas incorrectas o peligrosas de instalación, inspección, mantenimiento o retiro.

Avis : Andrew décline toute responsabilité pour les conséquences de procédures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.

Hinweis: Andrew lehnt jede Haftung oder Verantwortung für Schäden ab, die aufgrund unsachgemäßer Installation, Überprüfung, Wartung oder Demontage auftreten.

Atenção: A Andrew abdica do direito de toda responsabilidade pelos resultados de práticas inadequadas e sem segurança de instalação, inspeção, manutenção ou remoção.

Avvertenza: Andrew declina eventuali responsabilità derivanti dall'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.

注意 Andrew 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負責 何義務和責任



Andrew Corporation
10500 West 153rd Street
Orland Park, IL U.S.A. 60462

Telephone: 708/349-3300
FAX (U.S.A.): 1-800/349-5444
Internet: <http://www.andrew.com>

Customer Service, 24 hours: U.S.A. • Canada • Mexico: 1-800/255-1479
U.K.: 0800 250055
Other Europe: +44 592 782 612

Printed in U.S.A. 1/06

Copyright © 2006 by Andrew Corporation