

ShareLite™ Wideband Diplexer – In-line 698-960 MHz/1710-2200 MHz, full DC/AISG pass

Product Description

The ShareLite FD9R6004 Series of diplexers are designed to enable feeder sharing between systems in the 698-960 MHz range and in the 1710-2200 MHz range, including all the new AWS-3 paired spectrum blocks (G, H, I, J).. The diplexer is equipped with in-line connector placement so it can be installed in the BTS cabinet or at the tower top. This is especially valuable in crowded sites or when the feeders are not easily accessible. Due to its wideband design, the FD9R6004 Series can accommodate many combining solutions between 698-960 MHz and 1710-2200 MHz systems such as LTE 700 MHz, Cellular 800 MHz with PCS, GSM900 with GSM1800, or GSM900 with UMTS. This diplexer features a highly selective filter. It provides a high level of isolation between ports, while keeping the insertion loss on both paths at an extremely low level. The FD9R6004 diplexers are available with various DC pass options, helpful in configurations with or without the Tower Mount Amplifiers installed.

**Features/Benefits**

- LTE and AWS-3 ready design
- Extremely Low Insertion Loss
- High level of Rejection between bands – Protection against interferences
- Extremely High Power Handling Capability
- DC/AISG 1.1/2.0 pass through all ports
- Very compact & small size design – Easy installation and reduced tower load
- In-line long-neck connectors for easy connection & waterproofing
- Exceptional reliability & environmental protection (IP 67)
- Equipped with 1 * Breathable Vent – Prevent any humidity inside the product
- Mounting hardware for Wall and Pole mount provided (P/N SEM2-1A)
- Grounding already provided through the mounting bracket
- Kit available for easy dual mount

Technical Specifications

Product Type	Diplexer/Cross Band Coupler
Application	LTE700, GSM900, UMTS, GSM1800, Cellular 800, PCS, AWS-1, AWS-3
Frequency Range 1, MHz	698-960
Frequency Range 2, MHz	1710-2200
Configuration	Sharelite Single diplexer, outdoor, full DC pass, with mounting hardware SEM2-1A
Mounting	Wall Mounting: With 4 screws (maximum 6mm diameter); Pole Mounting: With included clamp set 40-110mm (1.57-4.33)
Return Loss All Ports Min/Typ, dB	19/23
Power Handling Continuous, Max, W	1250 at common port; 750 in low frequency path & 500 in high frequency path
Power Handling Peak, Max, W	15000 in low frequency path & 8000 in high frequency path
Impedance, Ohms	50
Insertion Loss, Path 1, dB	0.07 typ.
Insertion Loss, Path 2, dB	0.13 typ.
Rejection Between Bands Min/Typ, dB	58/64@698-960MHz; 57/70@1710-2200MHz
IMP Level at the COM Port, Typ, dBm	-112 @ 2x43
DC Pass in Low Frequency Path	Yes
DC Pass in High Frequency Path	Yes
Temperature Range, °C (°F)	-40 to +60 (-40 to +140)
Environmental	ETSI 300-019-2-4 Class 4.1E
Ingress Protection	IP 67
Lightning Protection	EN/IEC61000-4-5 Level 4
Connectors	In-line long-neck 7-16-Female
Weight, kg (lb)	1.2 (2.6)
Shipping Weight, kg (lb)	3.2 (7) for 2 * single units in 1 * box, 9.8 (21.6) for 6 * units = 3 * Boxes in 1 * overwrap
Dimensions, H x W x D, mm (in)	147 x 164 x 37 (5.8 x 6.5 x 1.5)
Shipping Dimensions, H x W x D, mm (in)	254 x 406 x 82 (10 x 16 x 3.2) for 2 * Single Units in 1 * box, 280 x 406 x 241 (11 x 16 x 9.5) for 6 * units = 3 * Boxes in 1 * overwrap
Volume, L	0.43
Housing	Aluminum

Notes




ShareLite™ Wideband Diplexer – In-line 698-960 MHz/1710-2200 MHz, full DC/AISG pass

Other Documentation

FD9R6004/1C-3L Installation Instructions: [Wideband_Diplexer_Installation_Rev5.pdf](#)

Selection Guide Diplexer 698-960 / 1710-2200MHz					
	Model Number	Full DC Pass	DC Pass High Band	DC Pass Low Band	Mounting Hardware Included
Single	FD9R6004/1C-3L				X
	FD9R6004/2C-3L				X
	FD9R6004/3C-3L				X
Dual	KIT-FD9R6004/1C-DL				X
	KIT-FD9R6004/2C-DL				X
	KIT-FD9R6004/3C-DL				X

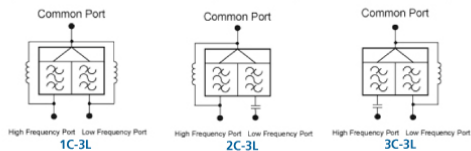

The FD9R6004 Series is upgradeable to a Dual Diplexer kit by means of 2 diplexers and mounting hardware kits SEM2-1A and SEM2-3

Mounting Hardware and Ground Cable Ordering Information		
Model Number	Description	
SEM2-1A	Mounting Hardware, Pole mount ø40-110mm (Included with the Single and Dual Diplexer) Wall Screws M6 (Not included with the product)	
SEM2-3	Assembly kit for 2 pcs of FD9R6004/xC-3L (Can be ordered separately but included with the Dual Diplexer Kit)	
CA020-2	Ground Cable, 2m, includes lugs (Optional)	
CA030-2	Ground Cable, 2m, includes lugs (Optional)	
SEM6	Mounting Hardware for 6 Diplexers, Tower Base (Optional)	