


ULTRAPROBE® 550

Analog Ultrasonic Inspection System

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

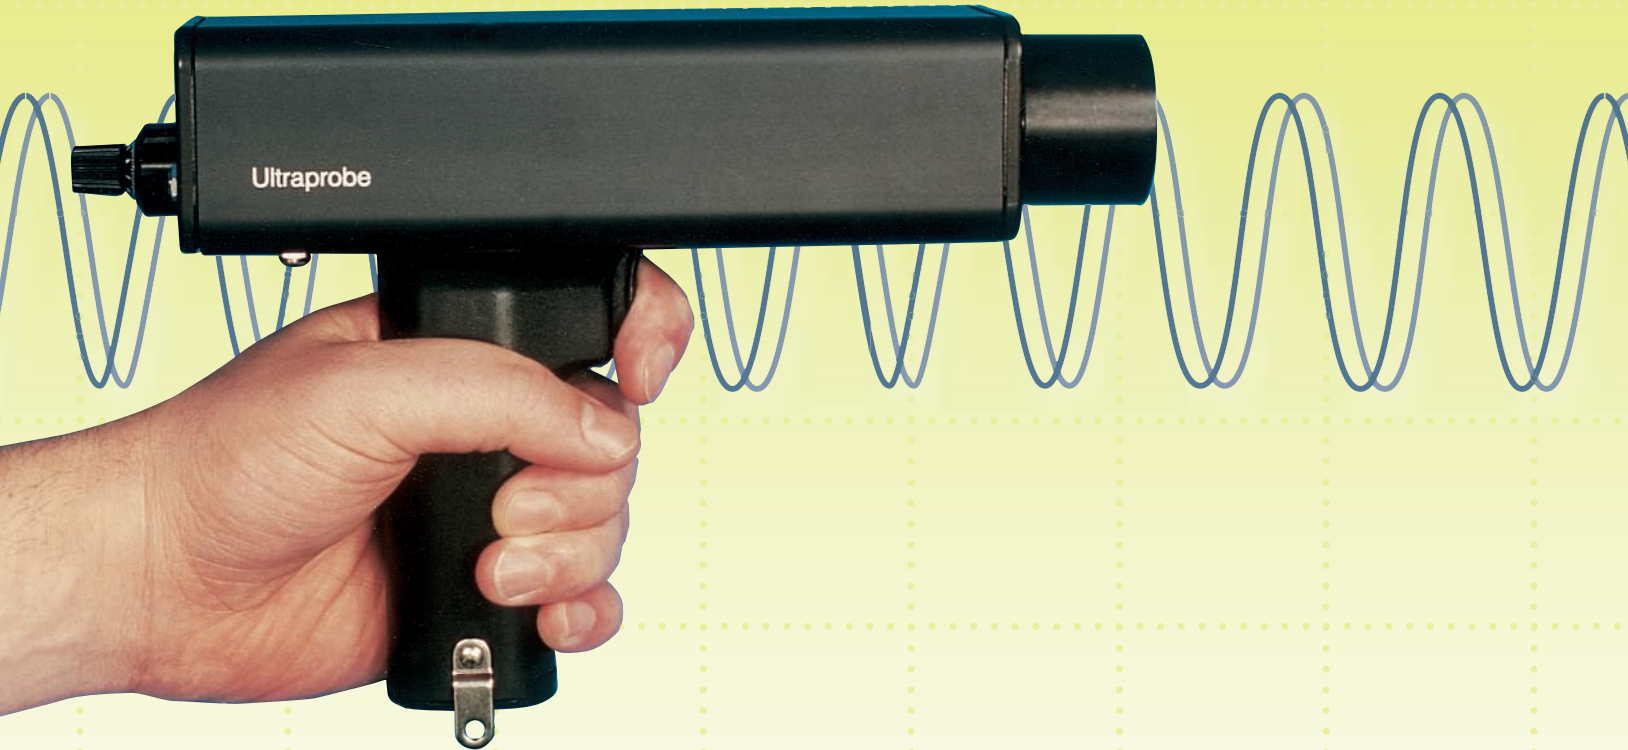

Versatile ultrasonic diagnostics for accurate and cost effective leak detection and mechanical inspection!

How it works:

Extremely versatile, the Ultraprobe® 550 is loaded with a selection of high tech accessories that will help meet the needs of practically any challenge faced by an inspection team. By combining enhanced sensitivity with advanced simplicity, the Ultraprobe 550 can locate leaks and detect electrical and mechanical problems.

Designed for ease of use, it often takes no more than 15 minutes to

become competent in testing with this instrument. The Ultraprobe 550 heterodynes ultrasound to the audible range, providing accurate sound reproduction.

The Ultraprobe 550 is ideally suited to work with virtually any plant program:

- Predictive Maintenance
- Energy Conservation
- Safety
- Quality Assurance
- Total Productive Maintenance
- Process Safety Management

Inspection information is provided through 3 modes:

- 1) **Auditory Channels (via an acoustically isolating headset)**
- 2) **Analog Meter**
- 3) **Demodulated Signal for vibration data collectors and other recording devices.**

ue
SYSTEMS INC
The ultrasound approach

ULTRAPROBE® 550

Ultraprobe versatility extends to ordering with customized kits on request.



Ultraprobe® 550 KIT

Ultraprobe 550 Kit Features:

- Metered Pistol Grip
- Ballistic Meter
- 10-Turn Potentiometer
- Numerically Calibrated Sensitivity Dial
- Battery
- Battery Indicator Light
- Battery Recharger Receptacle
- Head Set Receptacle
- Trisonic™ Scanning Module
- Rubber Focusing Probe
- Stethoscope (Contact) Probe
- Deluxe Headphones
- Extension Probe Kit
- Warble Tone Generator
- Battery Recharger (110V or 220V)
- Nylon Cordura Soft Carrying Case



ue
SYSTEMS INC
The *ultrasound* approach

Application Selection Chart

APPLICATION	KIT #	UP550KT	UP550SC	UP550C	UP550S
Pressure & Vacuum Leak Detection		✓	✓		✓
Hydraulic Valve Bypass		✓	✓	✓	
Exhaust System Leaks		✓	✓		✓
Heat Exchangers, Boilers, Condensers		✓	✓		✓
Valve & Steam Trap Inspection		✓	✓	✓	
Bearing Testing		✓	✓	✓	
Gear/Gear Box Inspection		✓	✓	✓	
Cockpit Window/Hatch Leaks		✓			
General Mechanical Inspection		✓	✓	✓	
Tanks, Pipes, Leak Testing, etc.		✓	✓		✓
Electrical Inspection		✓	✓		✓

Supported by Accessories (call, fax or e-mail for information)

- Holster Set
- Magnetic Mount Probe
- Long Range Module
- Ultrasonic Wave Form Concentrator (Parabolic Dish)
- Wide selection of Ultrasonic Tone Generators
- Hard Hat Headphones
- Extension Cable
- Training CDs

ULTRAPROBE® 550 Specifications

Construction:	Metered pistol housing; coated aluminum ABS plastic
Circuitry:	Solid State heterodyne receiver with temperature compensation
Frequency Response:	Peak response: 36-44 kHz (optimized for airborne leaks)
Probes:	Scanning Module patented Trisonic plug-in type consisting of a phased array of multiple transducers for airborne ultrasound. Rubber Focusing Probe (flexible) slips over scanning module to concentrate conical directivity and to shield reception of stray ultrasound. Also fits over Stethoscope Module to shield against high ambient ultrasound while unit is at maximum sensitivity. Stethoscope Module – plug-in type, insulated probe with RF shielding; 4 1/2" (11.4 cm) long stainless steel probe tip, conically shaped for uniform surface contact. Stethoscope Extension Kit: 3-piece, segmented metal rods to increase stethoscope contact range for 20" (50.8 cm) and 31" (76.2 cm).
Headset:	Noise isolating type: Double headset wired monophonic. Impedance, 16 ohms. Over 23 dB of noise attenuation. Meets or exceeds ANSI specifications and OSHA standards. For hard hat use.
Indicators:	Ballistic output meter. Low Level Battery LED indicator for main housing internal power supply.
Battery:	Self contained nickel metal hydride (environmentally safe). Rechargeable.
Pistol Unit Weight:	2 lbs. (.9 kg)
Carrying Case:	Nylon Cordura soft carrying case
Sensitivity:	Detects .005" (.127 mm) diameter leak @ 5 psi (.34 bar) at a distance of 50 ft. (15.24 m)
Threshold*:	1 x 10 ⁻² std. cc/sec to 1 x 10 ⁻³ std. cc/sec
Warranty:	1-year parts/labor standard. 5 years with completed warranty registration card.

*depends on leak configuration

Ultraprobe 550 Kit: Meets and exceeds ASTM E1002-2005 requirements for Leak Detection.

Covered by one or more of the following patents: 0151115; 0303776; 0315199; 1206586; 1297576; 1881263; 2562758; 2689339; 4416145; 4823600; 5955670; 6122966; 6339961; 6341518; 6415645; 6655214; 6707762; 6804992

UE Systems is committed to continual product improvement; therefore specifications are subject to change without notice. Warranty details are available by request.

TRANSCAT

Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001