
Machine Bolts - Square Head

Stainless Steel

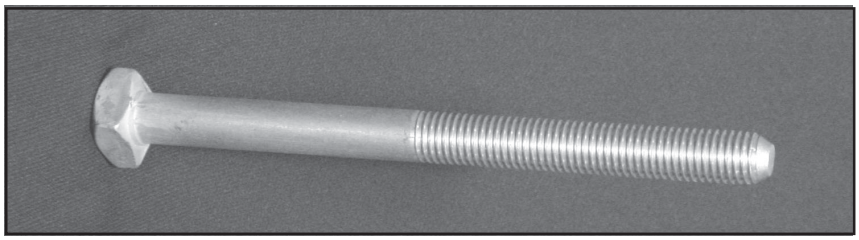

Min. Tensile Strength	
3/8 inch	4250 lbs.
1/2 inch	7800 lbs.
5/8 inch	12400 lbs.
3/4 inch	18350 lbs.
7/8 inch	25400 lbs.

3/8 INCH DIAMETER

CAT. NO	LENGTH INCHES	MIN. THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
MBSA10	1	3/4	7
MBSB10	1-1/2	1	9
MBSC10	2	1	10
MBSD10	2-1/2	1	12
MBSE10	3	1-3/4	13
MBSF10	3-1/2	2	14
MBSG10	4	3	15
MBSH10	4-1/2	3	16
MBSI10	5	3	18
MBSJ10	5-1/2	3	19

1/2 INCH DIAMETER

CAT. NO.	LENGTH INCHES	MIN. THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
MBSA15	1	3/4	16
MBSB15	1-1/2	1-1/4	17
MBSC15	2	1-1/4	20
MBSD15	2-1/2	1-1/4	22
MBSE15	3	1-1/4	24
MBSF15	3-1/2	1-1/4	27
MBSG15	4	3	29
MBSH15	4-1/2	3	32
MBSI15	5	3	33
MBSJ15	5-1/2	3	39
MBSK15	6	3	39
MBSL15	6-1/2	3	41
MBSM15	7	3	44
MBSN15	8	4	49
MBSP15	9	4	53
MBSQ15	10	6	58
MBSR15	11	6	65
MBSS15	12	6	70
MBST15	14	6	75
MBSU15	16	6	85
MBSV15	18	6	92
MBSW15	20	6	103

5/8 INCH DIAMETER

CAT. NO.	LENGTH INCHES	MIN. THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
MBSA20	1	1	25
MBSB20	1-1/2	1-1/2	35
MBSC20	2	1-1/2	36
MBSD20	2-1/2	1-1/2	40
MBSE20	3	1-3/4	42
MBSF20	3-1/2	1-3/4	49
MBSG20	4	3	50
MBSH20	4-1/2	3	55
MBSI20	5	3	57
MBSK20	6	3	64
MBSM20	7	4	74
MBSN20	8	4	82
MBSP20	9	4	88
MBSQ20	10	6	96
MBSS20	12	6	110
MBST20	14	6	124
MBSU20	16	6	140
MBSV20	18	6	156
MBSW20	20	6	168
MBSX20	22	6	188
MBSY20	24	6	196
MBSZ20	26	6	228

3/4 INCH DIAMETER


CAT. NO.	LENGTH INCHES	MIN. THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
MBSC25	2	1-3/4	53
MBSD25	2-1/2	2-1/8	58
MBSE25	3	1-3/4	65
MBSF25	3-1/2	1-3/4	71
MBSK25	6	3	101
MBSM25	7	4	112
MBSN25	8	4	124
MBSQ25	10	6	146
MBSS25	12	6	168
MBST25	14	6	192
MBSU25	16	6	210
MBSV25	18	6	230
MBSW25	20	6	272
MBSX25	22	6	280
MBSY25	24	6	296
MBSZ25	26	6	316

Please call for pricing.

Double Arming Bolts

Stainless Steel

- Rolled threads to assure uniformity and strength
- Cone points on all sizes
- Four regular square nuts furnished with each bolt.

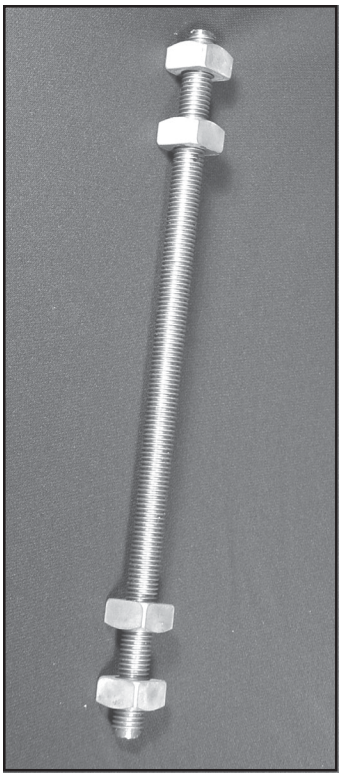

5/8 INCH DIAMETER

CAT. NO.	LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
DABA38	10	120
DABB38	12	132
DABC38	14	144
DABD38	16	164
DABE38	18	180
DABF38	20	192
DABG38	22	212
DABH38	24	224
DABI38	26	240
DABJ38	28	256
DABK38	30	280
DABL38	32	296
DABM38	34	298
DABN38	36	440

3/4 INCH DIAMETER


CAT. NO.	LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
DABB39	12	204
DABC39	14	216
DABD39	16	244
DABE39	18	260
DABF39	20	280
DABG39	22	304
DABH39	24	324
DABI39	26	348
DABJ39	28	373
DABK39	30	390
DABL39	32	400
DABM39	34	420
DABN39	36	450

Please call for pricing.

Oval Eye Bolts

Stainless Steel

Min. Tensile Strength	
5/8 inch	12400 lbs.
3/4 inch	18350 lbs.



5/8 INCH DIAMETER

CAT. NO.	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
OEB-5864	6	4	98
OEB-5884	8	4	114
OEB-5894	9	4	121
OEB-58106	10	6	132
OEB-58126	12	6	146
OEB-58146	14	6	160
OEB-58166	16	6	169
OEB-58186	18	6	187
OEB-58206	20	6	200

3/4 INCH DIAMETER

CAT. NO.	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
OEB-3484	8	4	181
OEB-34106	10	6	205
OEB-34126	12	6	217
OEB-34146	14	6	235
OEB-34166	16	6	265
OEB-34186	18	6	282

Double Arming Eye Bolts

Stainless Steel



Min. Tensile Strength	
5/8 inch	12400 lbs.
3/4 inch	18350 lbs.

5/8 INCH DIAMETER

CAT. NO.	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
EBDA1412	14	12	185
EBDA1614	16	14	205
EBDA1816	18	16	216
EBDA2018	20	18	232
EBDA2220	22	20	251
EBDA2422	24	22	279
EBDA2624	26	24	288


3/4 INCH DIAMETER

CAT. NO.	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
EBDA1614-75	16	14	312
EBDA1816-75	18	16	328
EBDA2018-75	20	18	358
EBDA2220-75	22	20	374
EBDA2422-75	24	22	389
EBDA2624-75	26	24	416

Please call for pricing.

Carriage Bolts

Stainless Steel

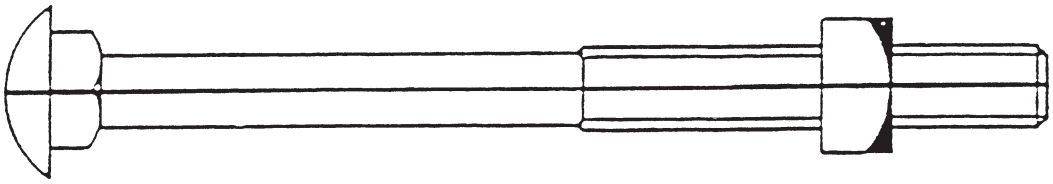

3/8 INCH DIAMETER


CAT. NO.	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
CBA32	3	2	12
CBA43	4	3	14
CBA453	4-1/2	3	16
CBA53	5	3	17
CBA553	5-1/2	3	18
CBA63	6	3	19
CBA73	7	3	22
CBA83	8	3	24
CBA106	10	6	29
CBA126	12	6	34

1/2 INCH DIAMETER

CAT. NO.	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
CBA453-1/2	4-1/2	3	30
CBA53-5	5	3	32
CBA553-5	5-1/2	3	35
CBA63-5	6	3	36
CBA74-5	7	4	41
CBA84-5	8	4	46
CBA106-5	10	6	53


Min. Tensile Strength	
3/8 inch	4250 lbs.
1/2 inch	7800 lbs.

CARRIAGE BOLTS ARE STAINLESS STEEL ROLLED THREADS WITH SQUARE SHOULDERS. EACH BOLT IS PROVIDED WITH ONE SQUARE NUT.

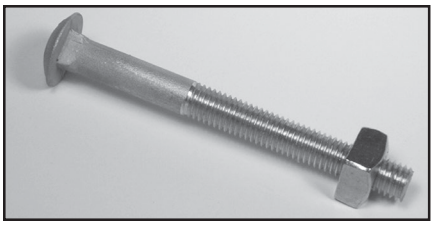

Brace Bolts

Stainless Steel

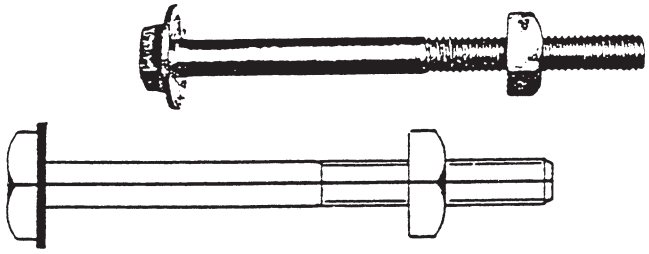

BRACE BOLTS HAVE ONE-PIECE WASHER HEADS FOR WRENCHING, MAKING RECLAIMING HARDWARE EASIER. BOLTS ARE USED FASTENING A BRACE TO A CROSS-ARM. EACH BOLT IS PROVIDED WITH ONE SQUARE NUT. MINIMUM TENSILE STRENGTH: 4,250 LBS.

CAT. NO	DIAMETER INCHES	BOLT LENGTH INCHES	THREAD LENGTH INCHES	APPX. SHIPPING WT. LBS. PER 100 PCS.
BBA452	3/8	4-1/2	2	22

Please call for pricing.