


PARTS & ACCESSORIES

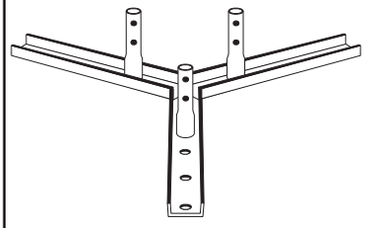


FLAT ROOF MOUNT
FR25G*
BOLTS DIRECTLY TO FLAT ROOF SURFACE.




SIDE ARM MOUNT
UHF25G
FOR UHF & FM ANTENNAS.




FACE MOUNT
DM25G2 - 2 3/8″ O.D. 5′ LONG




DBS ANTENNA MOUNT
KY2068A16 - 1.66″ O.D.
KY2068A15 - 1.50″ O.D.
KY2068A2 - 2.38″ O.D.
MOUNTING TUBE PROVIDED IS 3′ LONG.




SIDE ARM BRACKET
SA253UA
MOUNTING TUBE PROVIDED IS 3′ LONG,
2 - 1/4″ O.D.

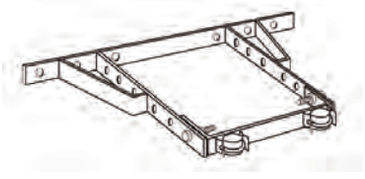


ADJUSTABLE HOUSE BRACKET
HB25AG 0 - 15″
HB25BG 0 - 24″
HB25CG 0 - 36″

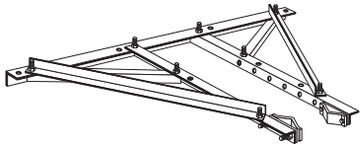


HEAVY DUTY UNIVERSAL HOUSE BRACKET
HBUTVRO
ADJUSTABLE TO POSITION TOWER
18″ - 36″ FROM WALL.

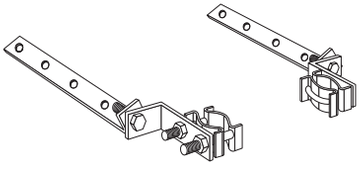


UNIVERSAL EAVE BRACKET
EB2525G
HINGED CONNECTION ALLOWS TOWER LEG CLAMPS TO REMAIN PERPENDICULAR TO GROUND WHILE BOLT DOWN SUPPORTS ROTATE TO LAY FLAT ALONG PITCHED ROOF OR EAVE.




TORQUE ARM STABILIZER ASSEMBLY
TA25
ANTI-TWIST DEVICE LOCATED IN THE AREA OF ANTENNAS. PROVIDES SIX-WAY GUYING. BOLTS TO TOWER AT ANY SECTION JOINT. ATTACHED WITH JOINT BOLTS. MUST BE INSTALLED AS SECTIONS ARE JOINED TOGETHER.



TORQUE BAR
TB25D
OPTIONAL, FOR USE WITH GA25GD.
REQUIRES (1) 3/8″ SHACKLE
FOR EACH BAR.

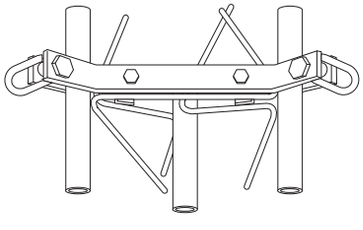

GUY BRACKET
GA25GD
MOUNTS TO TOWER AT ANY
HORIZONTAL BRACE.



ACCESSORY SHELF
AS25G
FOR MOUNTING MANY POPULAR ROTORS. FIELD DRILLING MAY BE NECESSARY FOR SOME ROTORS.

*** TOWERS MOUNTED ON THESE BASES MUST BE BRACKETED OR GUYED AT ALL TIMES. TEMPORARY STEEL GUYING MAY ALSO BE NECESSARY DURING INSTALLATION AND DISMANTLING.**

© 2011 ROHN PRODUCTS LLC