WALL MOUNTS




G-SERIES WALL BRACKETS & BASE MOUNTS

The HBUTVRO provides lateral support for 25G, 45G and 55G bracketed towers.


The bracket is pre-drilled to accept 5/8" dia. connectors to wall at 16" or 24" spacing.

Adjustable to position tower 18" - 36" from wall.

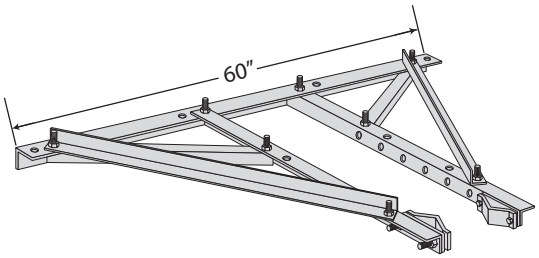


HBUTVRO

25GWM
FOR 25G WALL SUPPORTED TOWERS

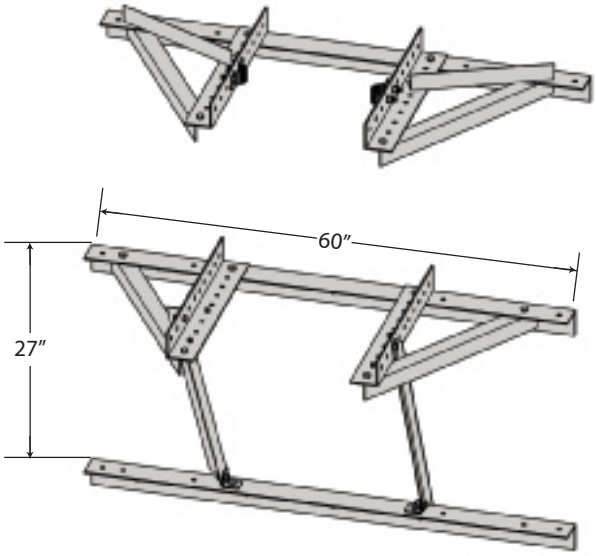

The 25GWM upper bracket provides lateral support for 25G wall supported towers. The lower bracket provides both lateral and vertical support. The 25G base plate (P/N KH6775, not shown) is provided with mount to provide an adjustable 6" - 20" of clearance to wall.

The brackets are pre-drilled to accept 5/8" dia. connectors at 16" or 24" spacing. A minimum 5' separation between the top and bottom brackets is recommended.

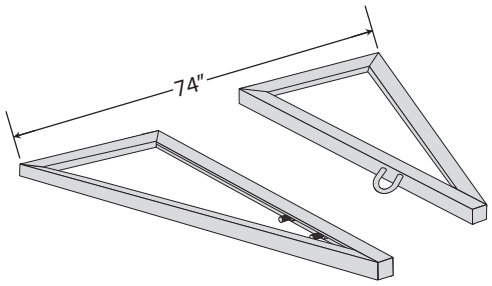

KH1014
FOR 65G BRACKETED TOWERS

The KH1014 bracket provides lateral support for 65G bracketed towers.

The brackets are pre-drilled to accept 3/4" dia. connectors to wall at various center-to-center spacings (4.75" increments).

Adjustable to position tower 18" - 30" from wall.

All mounts shown are hot-dip galvanized.

© 2011 ROHN PRODUCTS LLC