




SPECIFICATIONS

General	PIMShield Cable Support Brackets provide a high strength, low passive intermodulation mounting system to secure multiple plastic Cable Support Blocks (sold separately) in high risk PIM zones
Grip range	1.25-inch grip range with largest diameter (3.50-inch OD) mounting pipe
Mounting pipe range	2-inch to 3-inch nominal pipe (2.38-inch to 3.50-inch OD)
System PIM performance	IM3 < -100dBm when tested in accordance with proposed IEC62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque hardware to 10 FT-LB (ConcealFab tool 900053)
Material	Galvanized steel
Operating temperature	-40°C to +70°C
Case dimensions	12.0-inch x 7.0-inch x 9.5-inch
Case weight	21.5lb.
Qty per case	1 kit of 10

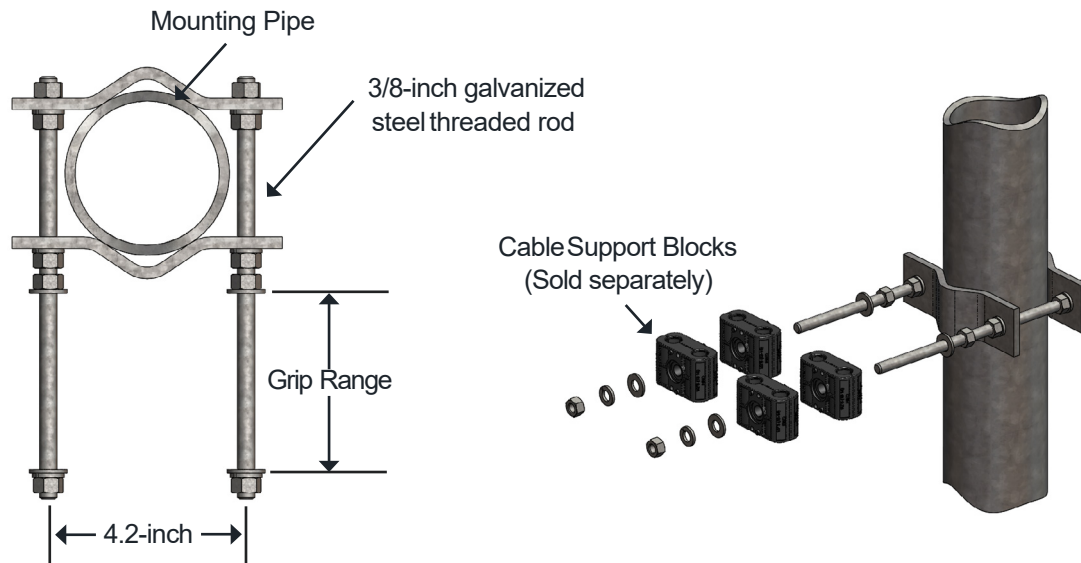

Questions? Visit www.Talleycom.com or contact Talley at 800.949.7079 or Sales@Talleycom.com today.