

Indoor/Outdoor 3-Line NID 1 IDC Universal Line Module, TandAction™ Hybrid Universal Station Protector

CORNING

Part Number: UNI-3003-13U1

The Corning UNI™ 3003 Series universal network interface devices are environmentally sealed units that provide demarcation points for subscriber lines. The three-line housings feature molded, engineering-grade thermoplastic construction and have corrosion-resistant brass and stainless-steel internal components. They are ideal for indoor and outdoor use.

The design enables one-step TELCO access to protector modules and network connections. Its versatile internal layout accepts industry-standard line modules and protectors. A snap-in ground feature minimizes installation time and wiring errors to deliver significant operational savings. Heavy-duty rear- and bottom-entry grommets are included to optimize internal wiring management.

The UNI-3003 features a universal line module (ULM), with insulation displacement connections (IDCs) or screw terminals, and integrated protection. It also allows for subscriber termination and TELCO demarcation and testing in one compact, modular unit.

The IDC universal line module is available with ADSL/VDSL splitter circuitry (ULM-DSL) that meets ADSL, ADSL2, ADSL2+, VDSL, and VDSL2 requirements and includes ring-trip enhancements to prevent video deployment errors. All ULMs have bypass switches that disengage the plug from the jack before wiring can be accessed – meeting UL safety standards.

Features and Benefits

Sealed Universal Line Module with integrated TandAction™ Hybrid or 3-element gas tube Station Protector


Advanced IDC terminations with superior surge protection protect valuable electronics

Instant snap-in line module and one-step telco cover access

Allows quick and easy installation, maintenance and line module expansions

Accepts current industry-standard line modules, protectors and DSL splitters

Universal footprint maximizes return on investment and reduces inventory complexity

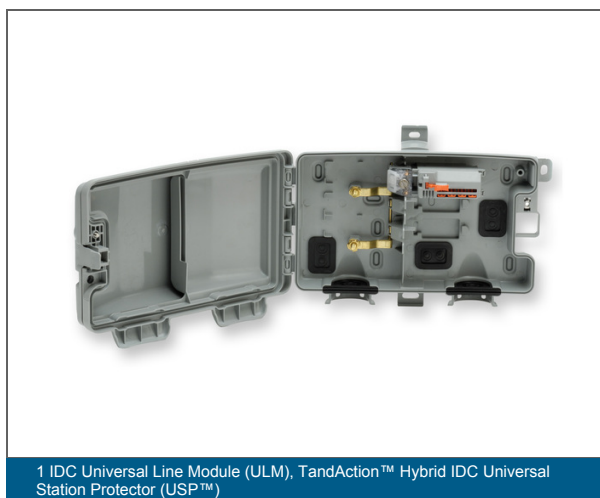

1 IDC Universal Line Module (ULM), TandAction™ Hybrid IDC Universal Station Protector (USP™)

Indoor/Outdoor 3-Line NID 1 IDC Universal Line Module, TandAction™ Hybrid Universal Station Protector

CORNING

Specifications

General Specifications

Product Type	Network Interface Devices (NIDs)
--------------	----------------------------------

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	USDA Rural Development Programs
UL-Listed	Listed to UL 477 and 497

Dimensions

Height	24.5 cm
Width	16.9 cm
Weight	48 kg

Ordering Information

Product Number	UNI-3003-13U1
Package Contents	1 IDC Universal Line Module (ULM), TandAction™ Hybrid IDC Universal Station Protector (USP™)
Shipping Weight	0.5 kg
Shipping Height	24.5 cm
Shipping Width	16.9 cm
Units per Delivery	10/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.