

Headend Racks & Accessories

MPC-12

12-Slot Universal Mini-Mod Chassis & Power Supply

MPC-PSF12/16

Universal Power Supply Module

Features

- High capacity fully regulated power supply provides the most efficient performance, ensuring reliability over a wide range of environmental conditions
- High efficiency power supply (over 70%) equipped with cooling fan minimizes power consumption and heat dissipation
- Current overload protection prevents damage to system and prolongs power supply life
- Internal fusing circuitry provides current overload protection and precise voltage regulation, preventing component damage



MPC-12 (front view)



MPC-PSF12/16 (front view)

MPC-BP

Universal-Chassis Blank Plate


Features

- Blocks escape of cool air when used with forced air ventilation systems
- Provides uniform look when not all module slots are filled
- Slides easily into ATX's mini-chassis systems and those of other manufacturers



MPC-BP (front view)

Also Available:
MPC-12C
(Chassis Only)

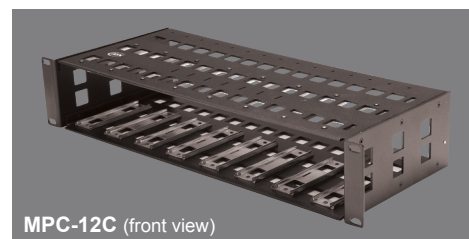

MPC-12C (front view)

Specifications

MODULE CAPACITY	12
INPUT VOLTAGE RANGE	100-240 VAC
INPUT VOLTAGE FREQUENCY	50/60 Hz
POWER REQUIRED	68W Each
OUTPUT VOLTAGE (V1) @ 4A	5 VDC
OUTPUT VOLTAGE (V2) @ 4A	12 VDC
EFFICIENCY	70%
LINE LOAD REGULATION	±1%
MINIMUM LOAD	10%
VIDEO INPUT CONNECTOR	75 Ω F-Female
AUDIO INPUT CONNECTOR	5K Ω F-Female Unbalance
RF OUTPUT CONNECTOR	75 Ω F-Female
UR LISTED POWER SUPPLY	Yes
OPERATING TEMPERATURE	+10°C to +50°C (+50°F to +122°F)
DIMENSIONS	
MPC-12/12C	3.5"H x 19.0"W x 7.5"D (8.89H x 48.26W x 19.1D cm)
MPC-BP	3.4"H x 1.0"W x 4.0"D (8.64H x 2.54W x 10.16D cm)
WEIGHT	
MPC12	7.8 lbs (3.54 kg)
MPC-BP	0.4 lbs (0.18 kg)

Ordering Information

Part Number	Description
MPC-12	12-slot Universal Mini-Mod Chassis and Power Supply
MPC-12C	12-slot Universal Mini-Mod Chassis Only
MPC-PSF12/16	Universal Power Supply
MPC-BP	Universal-Chassis Blank Plate

Products or features contained herein may be covered by one or more U.S. or foreign patents. Other non-ATX product and company names mentioned in this data sheet are the property of their respective companies.

© 2019 by ATX Networks Corp. and its affiliates (collectively "ATX Networks Corp."). All rights reserved. This material may not be published, broadcast, rewritten, or redistributed. Information in this document is subject to change without notice.
Rev. 12/19 (ANW1297)



ATX Networks

Tel: 289.204.7800 | Toll-Free: 866.YOUR.ATX | support@atx.com