

All-Dielectric Indoor/Outdoor Riser Simplex Cable, Reel in Box, 1000 FT

Product Classification

Regional Availability	Asia Australia/New Zealand Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	R-SP


General Specifications

Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Ivory
Jacket Marking	Feet
Total Fiber Count	1

Dimensions

Diameter Over Jacket	2.9 mm 0.114 in
----------------------	-------------------

Representative Image

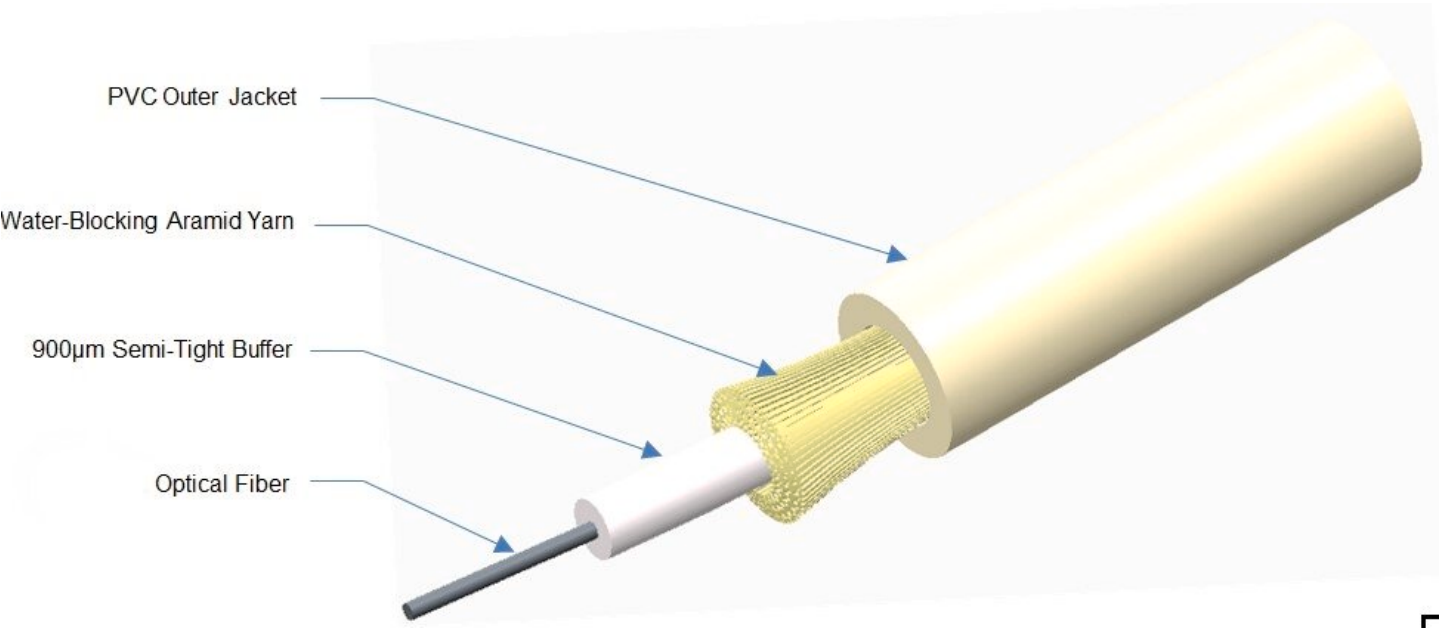

Mechanical Specifications

Minimum Bend Radius, loaded	50 mm 1.969 in
Minimum Bend Radius, unloaded	30 mm 1.181 in
Tensile Load, long term, maximum	30 N 6.744 lbf
Tensile Load, short term, maximum	100 N 22.481 lbf
Compression	22 N/mm 125.623 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	0.74 N-m 6.55 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	334 m 1,095.801 ft

Optical Specifications

Fiber Type

G.657.A2 | G.657.A2/B2

Environmental Specifications

Installation temperature

-20 °C to +60 °C (-4 °F to +140 °F)

Operating Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Storage Temperature

-40 °C to +75 °C (-40 °F to +167 °F)

Cable Qualification Standards

ANSI/ICEA S-104-696 | Telcordia GR-409

Environmental Space

Riser

Flame Test Listing

NEC OFNR (ETL) and c(ETL)

Flame Test Method

CSA FT4 | UL 1666

Jacket UV Resistance

UV stabilized

Water Penetration

24 h

Water Penetration Test Method

FOTP-82 | IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze

-2

Low High Bend

-30 °C to +60 °C (-22 °F to +140 °F)

Low High Bend Test Method

FOTP-37 | IEC 60794-1 E11

Temperature Cycle

-40 °C to +70 °C (-40 °F to +158 °F)

Temperature Cycle Test Method

FOTP-3 | IEC 60794-1 F1

Packaging and Weights

Cable weight

7.9 kg/km | 5.309 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

ROHS

Compliant

UK-ROHS

Compliant



Included Products

CS-8G-TB

- Enhanced Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber (ITU-T G.657.A2, B2)