
8107934/DB | O-002-DF-8W-F02NS

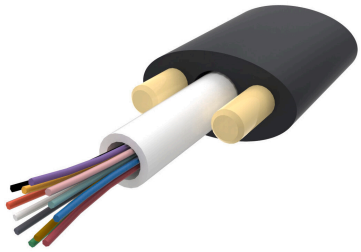

Fiber outdoor drop cable, LightScope® ZWP Self-Supporting All-Dielectric, Singlemode G.652.D and G.657.A1, 2 fiber Arid Core construction, Gel-filled, central loose tube, Feet jacket marking, Black jacket color

Product Classification

Regional Availability	Asia | Australia/New Zealand | EMEA | Latin America | North America
Portfolio	CommScope®
Product Type	Fiber drop cable
Product Series	O-DF

General Specifications


Cable Type	Central loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Feet
Subunit, quantity	1
Fibers per Subunit, quantity	2
Total Fiber Count	2

Dimensions

Height Over Jacket	4.5 mm | 0.177 in
Buffer Tube/Subunit Diameter	3 mm | 0.118 in
Diameter Over Jacket	7.9 mm | 0.311 in

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026

Representative Image

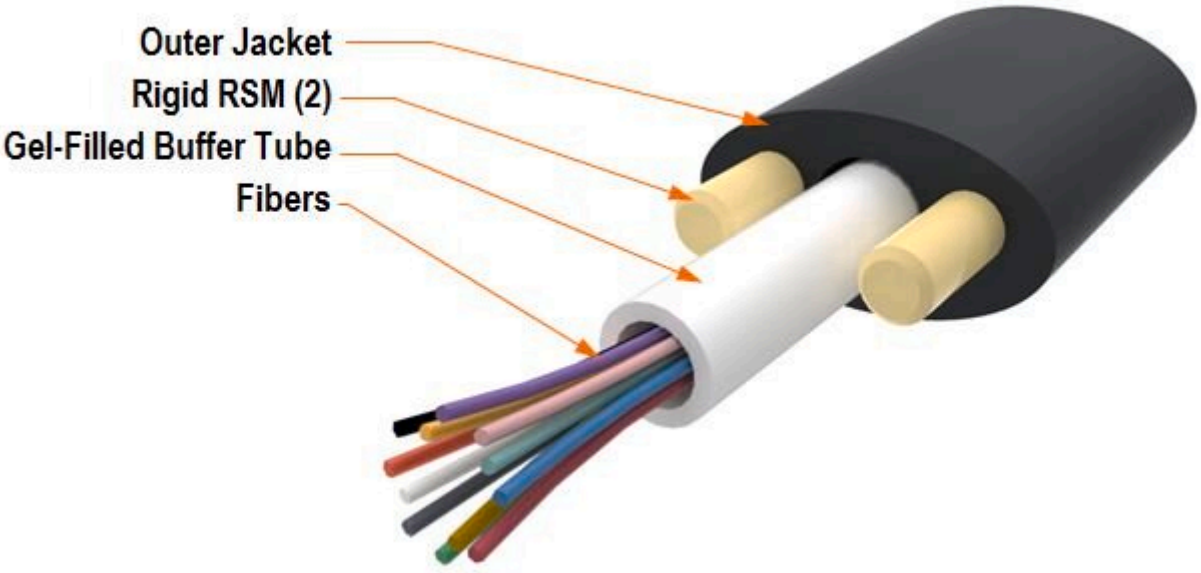

Material Specifications

Jacket Material	PE

Mechanical Specifications

Minimum Bend Radius, loaded	86 mm | 3.386 in
Minimum Bend Radius, unloaded	81 mm | 3.189 in
Tensile Load, long term, maximum	400 N | 89.924 lbf
Tensile Load, short term, maximum	1334 N | 299.895 lbf
Compression	10 N/mm | 57.101 lb/in
Compression Test Method	FOTP-41 | IEC 60794-1 E3
Flex	35 cycles
Flex Test Method	FOTP-104 | IEC 60794-1 E6
Impact	2.94 N-m | 26.021 in lb
Impact Test Method	FOTP-25 | IEC 60794-1 E4
Strain	See long and short term tensile loads

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026

Strain Test Method	FOTP-33 | IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 | IEC 60794-1 E7
Vertical Rise, maximum	1047 m | 3,435.039 ft

Optical Specifications

Fiber Type	G.652.D and G.657.A1

Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-110-717 | Telcordia GR-20
Environmental Space	Aerial, self-support | Buried
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 | IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze	-2 °C | 28.4 °F
Cable Freeze Test Method	FOTP-98 | IEC 60794-1 F15
Drip	70 °C | 158 °F
Drip Test Method	FOTP-81 | IEC 60794-1 E14
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 | IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 | IEC 60794-1 F1

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026

Packaging and Weights

Cable weight	39 kg/km | 26.207 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant

Included Products

DB-8W-LT	-	LightScope® ZWP Singlemode Fiber

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026