
FST-D-HS

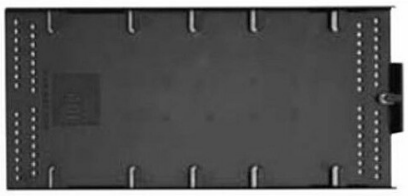

FST Fiber Optic Splice Tray, 24 splice capacity

Product Classification

Regional Availability	Latin America | North America
Product Type	Fiber splice tray

General Specifications

Application	For use with FDF splice panels
Color	Black
Splicing Capacity, maximum	24

Environmental Specifications

Storage Temperature	-40 °C to +85 °C (-40 °F to +185 °F)

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

©2026 CommScope Technologies LLC, an Amphenol company. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: July 17, 2026