

Schedule 80 Conduit
10’ Lengths

CANTEX Schedule 80 Conduit complies with federal and military specifications by conforming to UL 651. The deep bells provides a stronger joint, less chance of leakage and less pull-apart during installation.



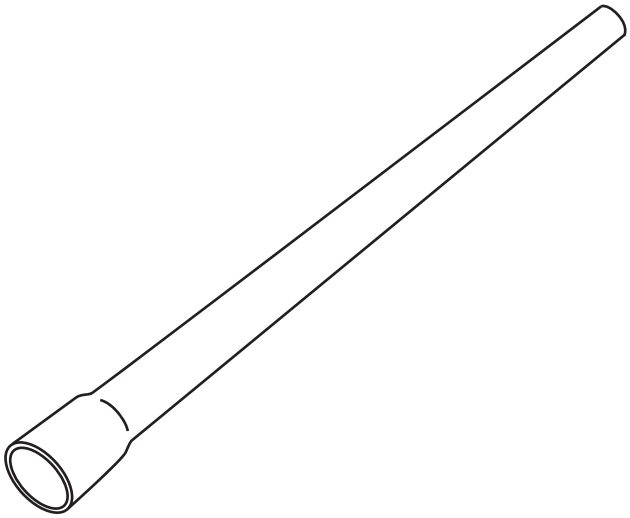

UL Listed UL651
UL File #E34052
UL Category Code DZYR
UL Control Number 41UM
NEMA TC2 compliant
See NEC Article 352 for use
Sunlight resistant
Max 90° C Wire
Material is Rigid PVC
Complies with Federal
Specification WC-1094

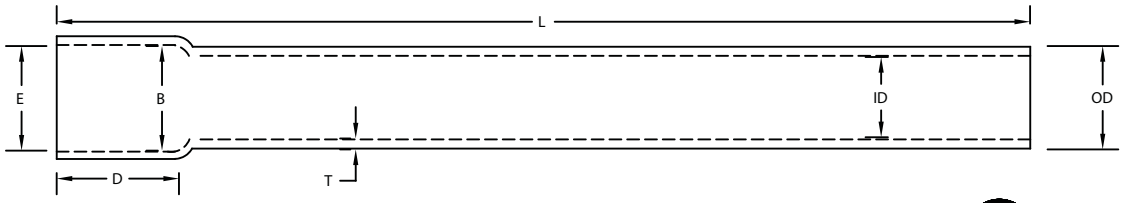

Part Number	Size	Length (Feet)	Weight per Foot (Lbs.)	Weight per Piece (Lbs.)	"T" (MIN)	OD	ID (MIN)	"E"	"B"	"D" (MIN)	"L" (MIN) Inches
A53AE12	1/2	10	0.221	2.210	0.147	0.840	0.502	0.852	0.836	1.500	120
A53AG12	3/4	10	0.301	3.010	0.154	1.050	0.698	1.064	1.046	1.750	120
A53BA12	1	10	0.443	4.430	0.179	1.315	0.910	1.330	1.310	2.000	120
A53BC12	1 1/4	10	0.610	6.100	0.191	1.660	1.227	1.677	1.655	2.250	120
A53BE12	1 1/2	10	0.739	7.390	0.200	1.900	1.446	1.918	1.894	2.500	120
A53CA12	2	10	1.023	10.230	0.218	2.375	1.881	2.393	2.369	3.000	120
A53CE12	2 1/2	10	1.561	15.610	0.276	2.875	2.250	2.890	2.868	3.250	120
A53DA12	3	10	2.232	22.320	0.300	3.500	2.820	3.515	3.492	3.750	120
A53DE12	3 1/2	10	2.724	27.240	0.318	4.000	3.280	4.015	3.992	4.000	120
A53EA12	4	10	3.264	32.640	0.337	4.500	3.737	4.515	4.491	4.500	120
A53FA12	5	10	4.529	45.290	0.375	5.563	4.713	5.593	5.553	5.500	120
A53GA12	6	10	6.236	62.360	0.432	6.625	5.646	6.658	6.614	6.120	120

CANTEX INC. 301 Commerce Suite 2700 Fort Worth, Texas 76102 817-215-7000 Fax: 817-215-7001 www.cantexinc.com