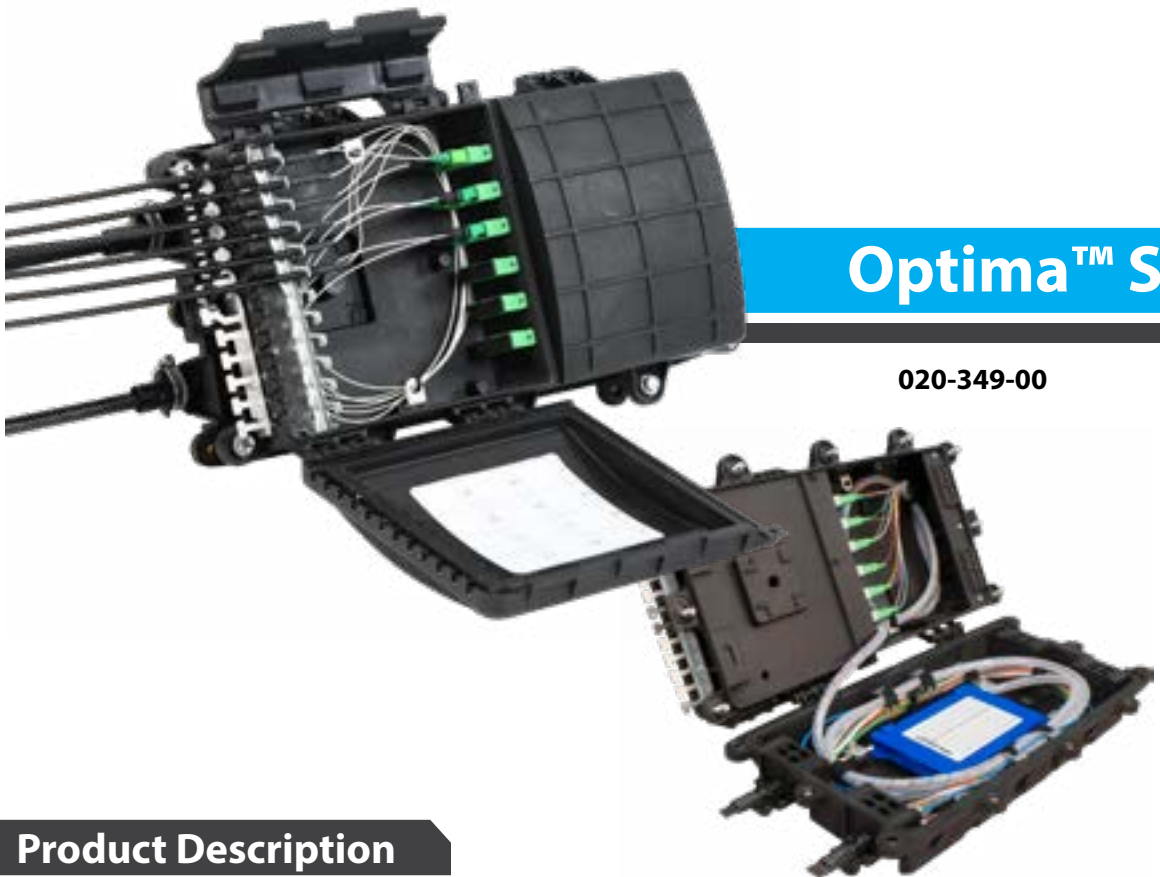




Optima™ S

020-349-00

Product Description

The Optima-S optical cross connect terminal offers the fastest hook up and disconnect of any drop cable field connection. The Optima-S utilized computer aided engineering for optimal use in the Outside Plant and FTTX networks. It utilizes a specially designed precision cost effective drop system with standard bulkhead adapters. The Optima-S brings subscriber terminal deployment to a new level for field installations. Has provisions for an expandable feed through capability to other Optima-S terminal devices.

Features & Benefits


Factory Terminated & Tested
Provisions For Field Installation & Termination
Pre Terminated Feeder Cable Ends OR Non Connectorized Sub Ends
Fast Drop Deployment To The Subscriber
12 Port Terminal Capacity
Re-Enterable Terminal Housing Allows For Fast Trouble Shooting & Replacing Connectors
Industries Most Versatile Mounting System
Capable of housing up to 72 splices

Specifications

Parameter	Specification
Dimensions:	8.25"H x 14.84"W x 4.38"D (vertically installed: 14.84"H x 8.25"W x 4.38"D)
Material:	UV Stabilized Plastic
Color:	Black
Mounting:	Pole, Pedestal, Strand (horizontal & vertical), Wall
Output Ports:	4 Port – Stock ID #020-349-10 8 Port – Stock ID #020-349-20 12 Port – Stock ID #020-349-30
Splice Tray:	12-SSTP
Splice Tray Capacity:	3
Splice Capacity Per Tray:	24 Splices
Input Feeder Ports:	4
Drop Cable Compatibility:	Flat Cable Round Cable
Safety Standards:	Designed to GR-771 IP68

Accessories

Mounting Kits


Products	Description	Stock ID
	Horizontal Tap Bracket Kit	072-391-21
	Vertical Tap Bracket Kit	072-579-10
	Surface Mounting Kit	072-365-20
	Slack Rack Mount	065-058-10
	Slack Rack Bracket Kit	072-741-10

Accessories

Splice Tray

Products	Description	Stock ID
	12-SSTP	072-394-10

Grommets

Products	Description	Stock ID
	Plug Grommet	642-112-10
	Round Cable Grommet .43" Diameter	642-113-13
	Round Cable Grommet .48" Diameter	642-113-10
	Round Cable Grommet .58" Diameter	642-113-14
	Round Cable Grommet .68" Diameter	642-113-15
	(1) Flat Cable Grommet	642-114-10
	(4) Round Cable Grommet 3mm	642-089-20
	Flat Cable Pin	10-7726
	Round Cable Pin 3mm	649-261-10

Accessories


NPT Fittings

Products	Description	Stock ID
	1/2" NPT Fitting	072-567-10

Ground Lug

Products	Description	Stock ID
	Grounding Lug	072-121-10

Connectivity

Products	Description	Stock ID
	SC/APC Duplex Adapter	10-5378
	LC Quad UPC Adapter	065-239-10

Drop Cable

Products	Description	Stock ID
	OptiDrop™	Custom

Surelight® Field Installable Kits

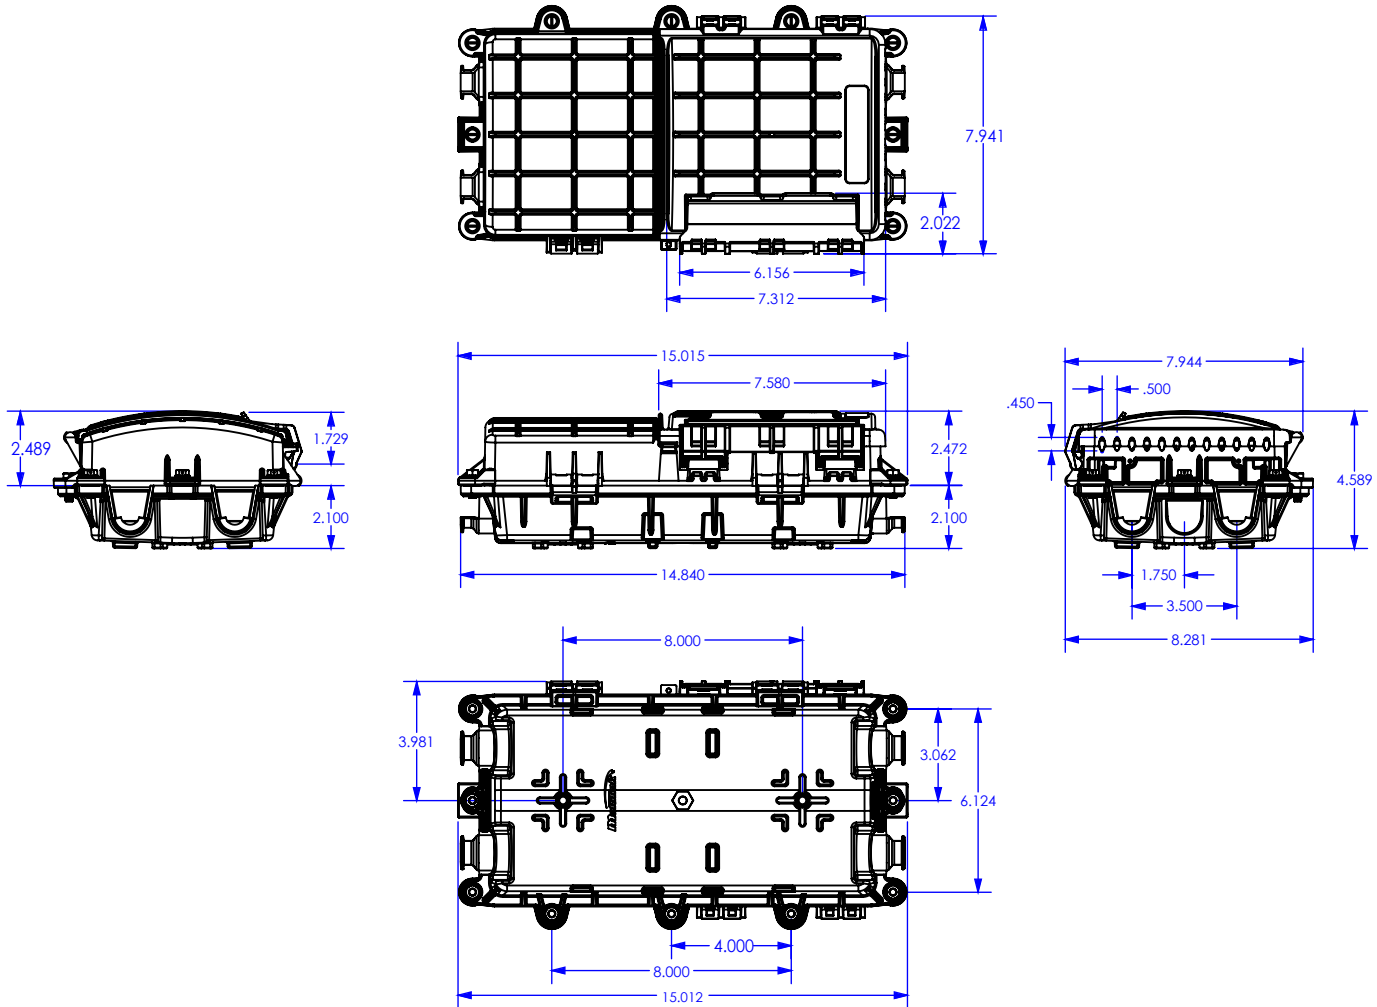
Products	Description	Stock ID
	Surelight® Field Installable Fiber Optic Tool Kit w/ Basic Cleaver	072-656-20
	Surelight® Field Installable Fiber Optic Tool Kit w/ High Precision Cleaver	072-656-21

Accessories

	OptiDrop™ Field Installable	072-560-10
---	-----------------------------	------------

Pigtails		
Products	Description	Stock ID
	6 Fiber, SC/UPC, SM	10-6415-ML
	6 Fiber, SC/APC, SM	10-6417-ML
	12 Fiber, SC/UPC, SM	10-6416-ML
	12 Fiber, SC/APC, SM	10-6418-ML

Dimensional Drawings





Ordering Guide

OPS					_____ - _____ - _____ - _____		
1	2	3	4	5	6	7	8

1	Model
OPS	Optima S

2	Patch Capacity
4	4 Port
8	8 Port
12	12 Port

3	Adapter Type
SCA	SC/APC
SCU	SC/UPC
LCA	LC/APC
LCU	LC/UPC

4	Mounting
V	Vertical (Strand)
H	Horizontal (Strand)
S	Surface (Wall)
P	Pole
N	None
SL	Slack Rack

5	Grounding Kit
Y	Yes
N	No

6	Grommet 1
M3	.43"
M4	.48"
M5	.58"
M6	.68"
F1	Flat Drop
R4	3mm Round Drop
B	Blank

6	Grommet 2
M3	.43"
M4	.48"
M5	.58"
M6	.68"
F1	Flat Drop
R4	3mm Round Drop
B	Blank

6	Grommet 3
M3	.43"
M4	.48"
M5	.58"
M6	.68"
F1	Flat Drop
R4	3mm Round Drop
B	Blank

6	Grommet 4
M3	.43"
M4	.48"
M5	.58"
M6	.68"
F1	Flat Drop
R4	3mm Round Drop
B	Blank

7	Splice Trays
0	0
1	1
2	2
3	3

8	Pigtails
Y	Yes
N	No



Multilink, Inc
580 Ternes Ln, Elyria, OH 44035
Tel: (440) 366-6966 Fax: (440) 366-6802



Scan QR for website.



facebook.com/GoMultilink1 twitter.com/GoMultilink youtube.com/GoMultilink

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Mobile: +1 440 366 6802 Email: lasupport@gomultilink.com